

ESEX Commentary

What is suspended sediment?

Anthony John Parsons,^{1*} James Cooper² and John Wainwright³

¹ Department of Geography, University of Sheffield, Sheffield, UK

² School of Environmental Sciences, University of Liverpool, Liverpool, UK

³ Department of Geography, Science Laboratories, University of Durham, Durham, UK

Received 6 March 2014; Revised 26 February 2015; Accepted 2 March 2015

*Correspondence to: Anthony John Parsons, Department of Geography, University of Sheffield, Winter Street, Sheffield, S10 2TN, UK. E-mail: a.j.parsons@sheffield.ac.uk

ESPL

Earth Surface Processes and Landforms

ABSTRACT: Suspended sediment is conventionally regarded as that sediment transported by a fluid that it is fine enough for turbulent eddies to outweigh settling of the particles through the fluid. Early work in the fluvial field attributed suspension to turbulence, and led to the notion of a critical threshold for maintaining sediment in suspension. However, research on both turbulence structures and the interactions between suspended sediment and bedforms in rivers has shown a more complex story and, although there appear to have been no studies of the impact of bedforms on aeolian suspended sediment concentrations, turbulent flow structures and transport rates of saltating particles have been shown to be affected. This research indicates that suspended sediment neither travels with the same velocity as the flow in which it is suspended, nor is it likely to remain in suspension in perpetuity, even under conditions of steady flow or in unsteady flow where the dimensionless critical threshold is permanently exceeded. Rather, like bedload, it travels in a series of hops, and is repeatedly deposited on the bed where it remains until it is re-entrained. Is there, therefore, a qualitative difference between suspended and saltating sediment, or is it just a quantitative difference in the size of the jump length and the frequency of re-entrainment? It is our contention that the distinction of suspension as a separate class of sediment transport is both arbitrary and an unhelpful anthropocentric artefact. If we recognize that sediment transport is a continuum and applies to any fluid medium rather than split into different “processes” based on arbitrary thresholds and fluids, then recognizing the continuity will enable development of an holistic approach sediment transport, and thus sediment-transport models that are likely to be viable across a wider range of conditions than hitherto. Copyright © 2015 John Wiley & Sons, Ltd.

KEYWORDS: suspended sediment; turbulence; virtual velocity

Suspended sediment is conventionally regarded as that sediment transported by a fluid that it is fine enough for turbulent eddies to outweigh settling of the particles through the fluid. In rivers, this load is generally divided into suspended bed material and finer material introduced into the flow (particularly during storm runoff), termed the wash load (Figure 1). In the field of aeolian sediment transport, suspended sediment is simply classified based on residence time in the atmosphere (Tsoar and Pye, 1987; Figure 2). Any such classifications, however, are secondary to the fundamental understanding of the mechanism by which suspension is achieved. Early work in the fluvial field [for a review see Graf (1971), and for the development of these ideas see Clifford (2008)] attributed suspension to turbulence, and led to the notion of a critical threshold for maintaining sediment in suspension. Specifically, this threshold was applied to the manner of transport of material entrained by the fluid from its bed, but in principle applies equally to the maintenance in suspension of material introduced into the fluid, for example by storm runoff into a river. Based upon qualitative reasoning from photographs (Prandtl, 1952), Bagnold (1966) postulated that sediment is maintained in suspension as a result of an asymmetry between upward and downward velocity components of shear turbulence that gives rise to a

residual upward momentum flux. He argued that it is this residual upward momentum flux that resists the tendency of the particle to fall under gravity and supports the mass of suspended sediment. He further argued that, since the movement of suspended sediment is unopposed, it travels with the same velocity as the fluid in which it is suspended.

The critical condition for sediment of a particular size being maintained in suspension by a given fluid flow – expressed as the critical shear velocity – has been the subject of considerable research in the fluvial literature but rather less so in the aeolian literature. The research has led to a variety of values for this critical condition (Figure 3). While for silt-sized grains composed of quartz the differences are very small, for sand-sized grains the differences in critical shear velocity range over an order of magnitude. Despite their numerical differences, however, all of these calculations for the critical conditions share a common characteristic: that they are based upon some ratio between a critical value of the time-averaged shear velocity u_{*c} (in m/s) and a time-averaged downward particle velocity that is assumed to be equal to its settling velocity w_s (in m/s). The reasoning behind this assumption is that the fluid flowing around a bed particle induces a drag that is comparable to the resistance exerted by the fluid on a suspended particle as

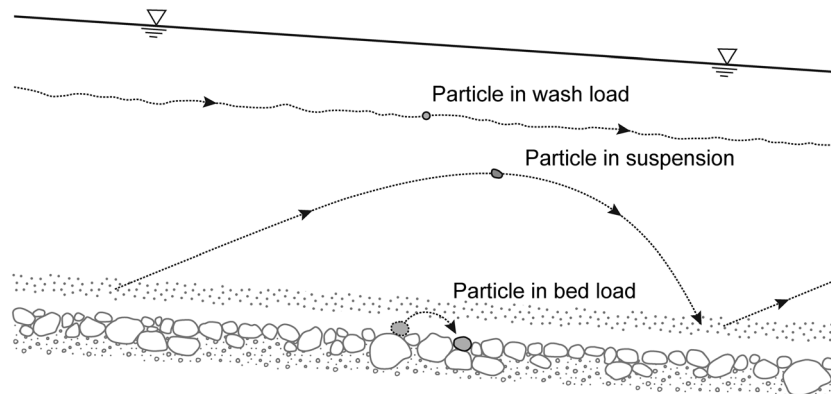


Figure 1. Modes of hydraulic sediment transport (adapted from Graf, 1998).

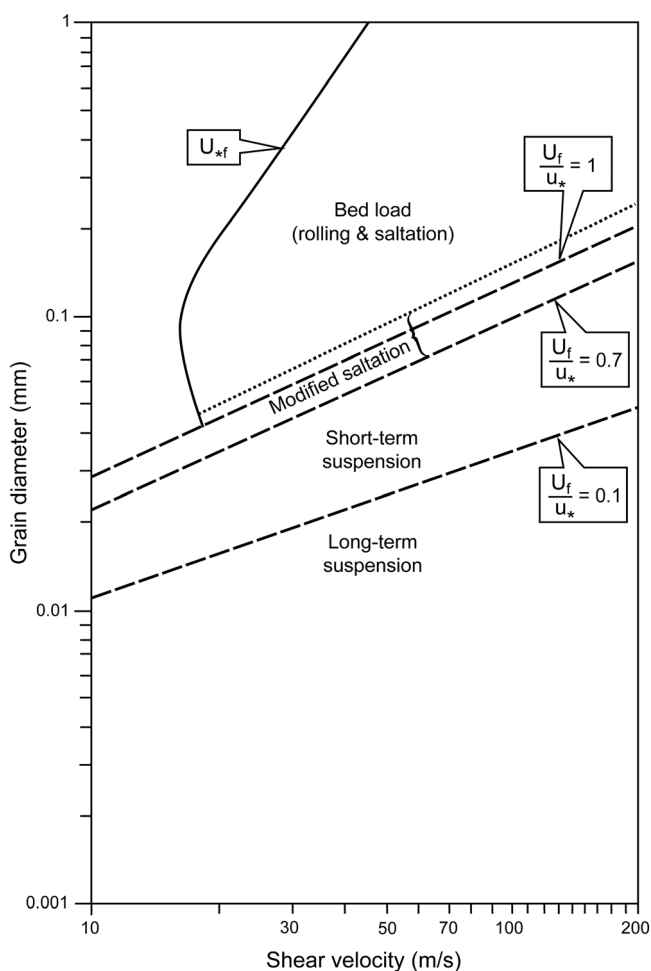


Figure 2. Modes of sediment transport in air (adapted from Tsoar and Pye, 1987).

it settles. The use of u_{*c} rather than the residual upward velocity component of shear turbulence for defining the critical conditions is justified by the fact that the latter varies with the former (Bagnold, 1966). In consequence, these equations predict that so long as the dimensionless critical threshold u_{*c}/w_c exceeds a critical value (k), under steady flow the sediment will remain in suspension. In the field of aeolian sediment transport, Owen (1964) proposed that the ratio of shear velocity to the particle's weight could be used as the upper limit for parabolic saltation trajectories of particles in wind. Bagnold (1966) tested the ratio u_{*c}/w_c for the critical conditions for suspension of particles by wind, and argued that the observed minimum size of dune sand provided support for the argument. Cooke *et al.* (1993) define k

as equal to one for aeolian suspension. The situation for suspended sediment transport in air is further complicated by the greater range of particle densities that result from the greater degree of particle aggregation in air than water.

Research on both turbulence structures and the interactions between suspended sediment and bedforms in rivers has shown a more complex story. Coherent turbulent flow structures, such as eddy-like, macro-turbulent structures (Roy *et al.*, 2004) and smaller-scale bursting events such as sweeps and ejections (Grass, 1971), reveal a two-way vertical exchange of fluid momentum between the sediment bed and the water surface. The advection and propagation of these turbulent flow structures results in this exchange being intermittent, of short duration and high magnitude (Willmarth and Lu, 1972). Thus the movement of suspended particles is strongly governed by the dynamics of these structures (Clifford *et al.*, 1993; Nezu and Nakagawa, 1993; Ashworth *et al.*, 1996; Niño and García, 1996; Nikora and Goring, 2002; Cuthbertson and Ervine, 2007). Suspended particles are driven both towards and away from the bed by these coherent flow structures, often expressed at the water surface as 'kolks' or 'boils'. These periodic motions can cause order-of-magnitude variations in apparent suspended sediment concentration and are thought to be responsible for much of the vertical mixing in rivers (Lapointe, 1992; Kostaschuck and Church, 1993; Thorne *et al.*, 1996; Babakaiff and Hickin, 1996). Turbulence is responsible not only for the travel of suspended particles but also their entrainment and subsequent deposition (e.g. Bai *et al.*, 2013). Thus the latter are not simply a function of the ratio between time-averaged shear velocity and settling velocity, as often assumed by earlier work. The further implication is that if turbulence causes suspended sediment to be repeatedly deposited and re-entrained then the sediment spends periods of time on the bed awaiting re-entrainment. Consequently, it has a virtual velocity that is less than the velocity of the transporting medium.

This body of research indicates that suspended sediment neither travels with the same velocity as the flow in which it is suspended (Breugem, 2012), nor is it likely to remain in suspension in perpetuity, even under conditions of steady flow or in unsteady flow where the dimensionless critical value of k is permanently exceeded. Rather, like bedload (e.g. Hassan *et al.*, 1991; Ferguson and Wathen, 1998), it travels in a series of hops, and is repeatedly deposited on the bed where it remains until it is re-entrained. Is there, therefore, a qualitative difference between suspended and saltating sediment, or is it just a quantitative difference in the size of the jump length and the frequency of re-entrainment? Van Rijn (1984) would appear to argue in favour of the latter definition in as much as he defined suspended sediment as that which does not touch the bottom for a streamwise distance of at least 100 particle

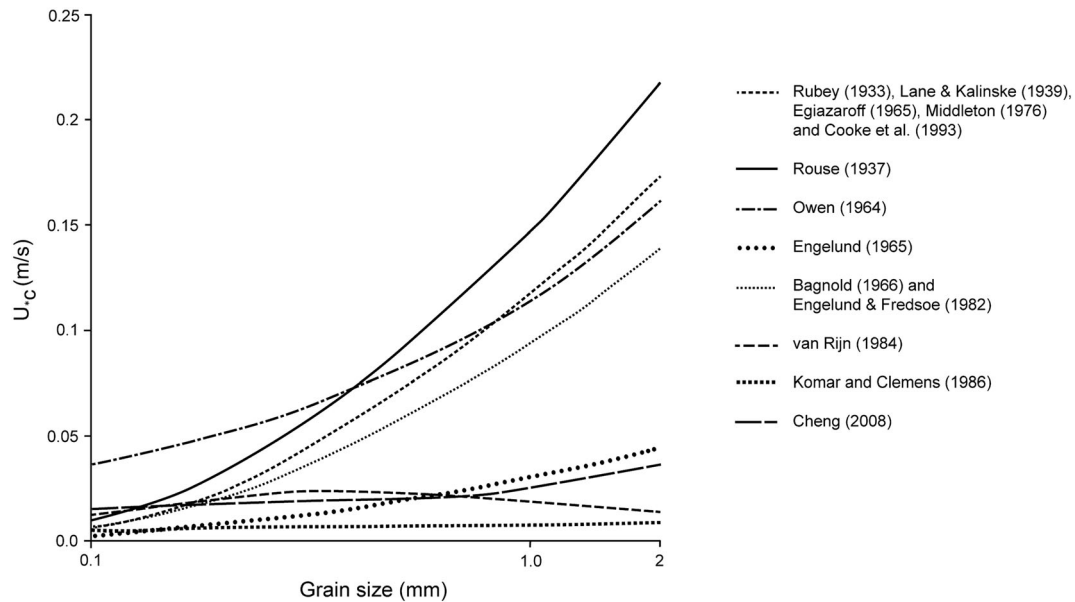


Figure 3. Estimates of the critical shear velocity for suspended sediment motion for grains of varying size.

diameters. Graf (1998, p. 384) begins the section on suspended-load transport with ‘transport of sediments in suspension is the mode of transport where the solid particles displace themselves by making large jumps, but remain (occasionally) in contact with the bed load and also with the bed’. Van Rijn’s (1984) definition has been frequently used since it was first introduced but as Niño *et al.* (2003, p. 250) note ‘... the definition of the precise threshold level has only statistical significance. Actually, there is a transition range of increasing values of the shear stress in which the frequency of the entrainment events, and the number of particles entrained by those events, increases from a negligible value to a large value’. Graf’s (1998) depiction of the path of suspended bed material (Figure 1) shows remarkable similarity to that of saltation in the aeolian literature in which there is also a recognition that the boundary between saltation and suspension is far from clear (Nickling and McKenna Neuman, 2009), and the term ‘modified saltation’ has been used to denote the trajectories of saltating particles that are affected by turbulence (Tsoar and Pye, 1987; Figure 2). We would argue, therefore, that there is no inherent physical difference between so-called suspended sediment and bedload or saltating load, and that, in reality, all sediment transport lies along a continuum of hop lengths and virtual velocities. It is our contention that the distinction of suspension as a separate class of sediment transport is both arbitrary and an unhelpful anthropocentric artefact; and to an extent is one that has come about because of measurement techniques.

If such a position is accepted then our current knowledge of virtual velocities and hop lengths is limited to the coarse end of this continuum. There has been substantial research into the virtual velocity (Hassan *et al.*, 1992; Ferguson and Wathen, 1998; Haschenburger and Church, 1998; Ferguson *et al.*, 2002) and hop length (Drake *et al.*, 1988; Habersack, 2002; Heays *et al.*, 2010; Lajeunesse *et al.*, 2010; Roseberry *et al.*, 2012) of bedload in rivers. Similarly, research on hop lengths (e.g. Nalpanis *et al.*, 1993; Cheng *et al.*, 2006; Zhang *et al.*, 2007) and velocities (e.g. Rasmussen and Sørensen, 2005; Kang *et al.*, 2008a, 2008b) of saltating particles in air is well established. However, because neither concept has been thought relevant to so-called suspended sediment, details of how fast suspended sediment moves in relation to the velocity of flow, either as virtual velocity including the periods of rest on

the bed or as actual velocity during movement, is lacking. If we recognize that sediment transport is a continuum and applies to any fluid medium rather than split into different ‘processes’ based on arbitrary thresholds and fluids, then recognizing the continuity will enable development of an holistic approach to sediment transport, and thus sediment-transport models that are likely to be viable across a wider range of conditions than hitherto.

Acknowledgements—The authors thank Andreas Baas, Jack Gillies, Greg Okin and Giles Wiggs for helpful discussions, and Mike Church, an anonymous reviewer and an associate editor for comments that helped improve this manuscript.

References

- Ashworth PJ, Bennett SJ, Best JL, McLelland SJ. 1996. *Coherent Flow Structures in Open Channels*. John Wiley & Sons: Chichester; 733 pp.
- Babakaiff CS, Hickin EJ. 1996. Coherent flow structures in Squamish River Estuary, British Columbia, Canada. In *Coherent Flow Structures in Open Channels*, Ashworth PJ, Bennett SJ, Best JL, McLelland SJ (eds). John Wiley & Sons: Chichester; 321–342.
- Bagnold RA. 1966. *An Approach to the Sediment Transport Problem from General Physics*, Professional Paper 422-1. US Geological Survey: Reston, VA.
- Bai J, Fang H, Stoesser T. 2013. Transport and deposition of fine sediment in open channels with different aspect ratios. *Earth Surface Processes and Landforms* **38**: 591–600.
- Breugem WA. 2012. Transport of Suspended Particles in Turbulent Open Channel Flow, PhD Thesis. Technical University of Delft.
- Cheng H, Zou X-Y, Zhang C-L. 2006. Probability distribution functions for the initial liftoff velocities of saltating sand grains in air. *Journal of Geophysical Research* **111**: D22205. DOI: 10.1029/2006JD007069
- Cheng N-S. 2008. Comparison of settling-velocity-based formulas for threshold of sediment motion. *Journal of Hydraulic Engineering, ASCE* **134**: 1136–1141. DOI: 10.1061/(ASCE)0733-9429(2008)134:8(1136)
- Clifford NJ. 2008. River channel processes and forms. In *The History of the Study of Landforms Volume 4*, Burt TP, Chorley RJ, Brunsten D, Cox NJ, Goudie AS (eds). The Geological Society: London; 217–324.
- Clifford NJ, French JR, Hardisty J. 1993. *Turbulence, Perspectives on Flow and Sediment Transport*. John Wiley & Sons: New York; 360 pp.
- Cooke RU, Warren A, Goudie AS. 1993. *Desert Geomorphology*. UCL Press: London; 526 pp.

- Cuthbertson A, Ervine D. 2007. Experimental study of fine sand particle settling in turbulent open channel flows over rough porous beds. *Journal of Hydraulic Engineering, ASCE* **133**: 905–916.
- Drake TG, Shreve RL, Dietrich WE, Whiting PJ, Leopold LB. 1988. Bedload transport of fine gravel observed by motion-picture photography. *Journal of Fluid Mechanics* **192**: 193–217.
- Egiazaroff IV. 1965. Calculation of nonuniform sediment concentrations. *Journal of Hydraulics Division ASCE* **91**(HY4): 225–247.
- Engelund F. 1965. A criterion for the occurrence of suspended load. *La Houille Blanche* **8**: 7.
- Engelund F, Fredsoe J. 1982. Sediment ripples and dunes. *Annual Review of Fluid Mechanics* **14**: 13–37.
- Ferguson RI, Wathen SJ. 1998. Tracer-pebble movement along a concave river profile: virtual velocity in relation to grain size and shear stress. *Water Resources Research* **34**: 2031–2038.
- Ferguson RI, Bloomer DJ, Hoey TB, Werritty A. 2002. Mobility of river tracer pebbles over different timescales. *Water Resources Research* **38**: 1045. DOI: 10.1029/2001WR002254
- Graf WH. 1971. *Hydraulics of Sediment Transport*. McGraw-Hill: New York; 513 pp.
- Graf WH, in collaboration with Altinakar MS. 1998. *Fluvial Hydraulics: Flow and Transport Processes in Channels of Simple Geometry*. John Wiley & Sons: Chichester; 681 pp.
- Grass AJ. 1971. Structural features of turbulent flow over smooth and rough boundaries. *Journal of Fluid Mechanics* **50**: 233–255.
- Habersack HM. 2002. Use of radio-tracking techniques in bed load transport investigations. In *Erosion and Sediment Transport Measurement in Rivers: Technological and Methodological Advances*, IAHS Publication 283. IAHS Press: Wallingford; 172–180.
- Haschenburger JK, Church M. 1998. Bed material transport estimated from the virtual velocity of sediment. *Earth Surface Processes and Landforms* **23**: 791–808.
- Hassan MA, Church M, Schick AP. 1991. Distance of movement of coarse particles in gravel bed streams. *Water Resources Research* **27**: 503–511.
- Hassan MA, Church M, Ashworth PJ. 1992. Virtual rate and mean distance of travel of individual clasts in gravel-bed channels. *Earth Surface Processes and Landforms* **17**: 617–627.
- Heays KG, Friedrich H, Melville BW. 2010. Advanced particle tracking for sediment movement on river beds: a laboratory study. *Proceedings, 17th Australasian Fluid Mechanics Conference*, Auckland, New Zealand, 5–9 December 2010.
- Kang LQ, Guo LJ, Gu ZM, Liu DY. 2008a. Wind tunnel experimental investigation of sand velocity in aeolian sand transport. *Geomorphology* **97**: 438–450.
- Kang LQ, Guo LJ, Liu DY. 2008b. Experimental investigation of particle velocity distributions in windblown sand movement. *Science in China Series G: Physics Mechanics and Astronomy* **51**: 986–1000.
- Komar PD, Clemens KE. 1986. The relationship between a grains settling velocity and threshold of motion under unidirectional currents. *Journal of Sedimentary Petrology* **56**(2): 258–266.
- Kostaschuck R, Church M. 1993. Macroturbulence generated by dunes. *Sedimentary Geology* **85**: 25–37.
- Lajeunesse E, Malverti L, Charru F. 2010. Bed load transport in turbulent flow at the grain scale: experiments and modelling. *Journal of Geophysical Research* **115**: F04001. DOI: 10.1029/2009JF001628
- Lane EW, Kalinske AA. 1939. The relation of suspended to bed material in rivers. *Transactions of the American Geophysical Union, Section of Hydrology* **20**: 637–641.
- Lapointe MF. 1992. Frequency spectra and intermittency of the turbulent suspension process in a sand-bed river. *Sedimentology* **43**: 439–449.
- Middleton GW. 1976. Hydraulic interpretation of sand size distributions. *Geology* **84**: 405–426.
- Nalpanis P, Hunt JCR, Barrett CF. 1993. Saltating particles over flat beds. *Journal of Fluid Mechanics* **251**: 661–685. DOI: 10.1017/S0022112093003568
- Nezu I, Nakagawa H. 1993. *Turbulence in Open Channel Flows*, IAHR Monograph. A.A. Balkema: Rotterdam.
- Nickling WG, McKenna Neuman C. 2009. Aeolian sediment transport. In *Geomorphology of Desert Environments*, Parsons AJ, Abrahams AD (eds). Springer: Berlin; 517–555.
- Nikora V, Goring D. 2002. Fluctuations of suspended sediment concentration and turbulent sediment fluxes in an open-channel flow. *Journal of Hydraulic Engineering, ASCE* **128**: 214–224.
- Niño Y, García M. 1996. Experiments on particle-turbulence interactions in the near wall region of an open channel flow: implications for sediment transport. *Journal of Fluid Mechanics* **326**: 285–319.
- Niño Y, Lopez F, García M. 2003. Threshold for particle entrainment into suspension. *Sedimentology* **50**: 247–263.
- Owen PR. 1964. Saltation of uniform grains in air. *Journal of Fluid Mechanics* **20**: 225–242.
- Prandtl L. 1952. *Essentials of Fluid Dynamics*. Blackie & Son: London.
- Rasmussen KR, Sørensen M. 2005. Dynamics of particles in aeolian saltation. In *Powders and Grains, Volume 2*. A.A. Balkema: Rotterdam; 967–971.
- Roseberry JC, Schmeekle MW, Furbish DJ. 2012. A probabilistic description of the bed load sediment flux: 2. Particle activity and motions. *Journal of Geophysical Research* **117**: F03032. DOI: 10.1029/2012JF002353
- Rouse H. 1937. Modern conceptions of the mechanics of fluid turbulence. *Transactions of the American Society of Civil Engineers* **102**: 463–543.
- Roy AG, Buffin-Bélanger T, Lamarre H, Kirkbride AD. 2004. Size, shape and dynamics of large-scale turbulent flow structures in a gravel-bed river. *Journal of Fluid Mechanics* **500**: 1–27.
- Rubey WW. 1933. Settling velocities of gravel, sand, and silt particles. *American Journal of Science* **25**(148): 325–338.
- Thorne PD, Hardcastle PJ, Hogg A. 1996. Observations of near-bed suspended sediment turbulence structures using multifrequency acoustic backscattering. In *Coherent Flow Structures in Open Channels*, Ashworth PJ, Bennett S, Best J, McLelland SJ (eds). John Wiley & Sons: Chichester; 343–358.
- Tsoar H, Pye K. 1987. Dust transport and the question of desert loess formation. *Sedimentology* **34**: 139–154.
- Van Rijn LC. 1984. Sediment transport part II: suspended load transport. *Journal of Hydraulic Engineering* **110**: 1613–1641.
- Willmarth WW, Lu SS. 1972. Structure of the Reynolds stress near the wall. *Journal of Fluid Mechanics* **55**(1): 65–92.
- Zhang W, Kang JH, Lee SJ. 2007. Tracking of saltating sand trajectories over a flat surface embedded in an atmospheric boundary layer. *Geomorphology* **86**: 320–331.