

1 Article

2 BioLPG for Clean Cooking in Sub-Saharan Africa: present and 3 future Feasibility of Technologies, Feedstocks, Enabling condi- 4 tions and Financing

5 Kimball Chen¹, Matthew Leach², Mairi Black², Meron Tesfamichael³, Francis Kemausuor⁴, Patrick Littlewood⁵,
6 Terry Marker⁵, Onesmus Mwabonje⁶, Yacob Mulugetta³, Richard Murphy², Rocio Diaz-Chavez^{6,7}, John Hauge¹,
7 Derek Saleeby¹, Alex W. Evans¹, Elisa Puzzolo^{1,8}

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

¹Global LPG Partnership, New York, USA

²University of Surrey, Centre for Environment and Sustainability, Guildford, UK

³University College London

⁴Kwame Nkrumah University of Science and Technology, Brew-Hammond Energy Centre, Kumasi, Ghana

⁵Gas Technology Institute

⁶Imperial College, Centre for Environmental Policy, London UK

⁷Stockholm Environment Institute, Africa Centre, Nairobi, Kenya

⁸University of Liverpool, Department of Public Health, Policy and Systems, Liverpool, UK

* Correspondence: puzzoloe@liverpool.ac.uk

Abstract: Energy supply for clean cooking is a priority for Sub-Saharan Africa (SSA). Liquefied petroleum gas (LPG, i.e. propane or butane or a mixture of both), is an economically efficient, cooking energy solution used by over 2.5 billion people worldwide and scaled up in numerous low- and middle-income countries (LMICs). Investigation of the technical, policy, economic and physical requirements of producing LPG from renewable feedstocks (bioLPG) finds feasibility at scale in Africa. Biogas and syngas from circular economy repurposing of municipal solid waste and agricultural waste can be used in two groundbreaking new chemical processes (Cool LPG or Integrated Hydrolysis and Hydroconversion (IH²)) to selectively produce bioLPG. Evidence about the nature and scale potential of bioLPG presented in this study justifies further investment in the development of bioLPG as a fuel that can make a major contribution toward enabling an SSA green economy and universal energy access. Techno-economic assessments of five potential projects from Ghana, Kenya and Rwanda illustrate what might be possible. BioLPG technology is in early days of development, therefore normal technology piloting and de-risking need to be undertaken. However, fully developed bioLPG production could greatly reduce the public and private sector investment required to significantly increase SSA clean cooking capacity.

Keywords: BioLPG, LPG, propane, butane, clean cooking, green economy, circular economy, renewable feedstocks, Cool LPG, IH², municipal solid waste, agricultural waste, biogas.

Citation: Chen, K.; Leach, M. et al. Title. *Energies* **2021**, *14*, x. <https://doi.org/10.3390/xxxx>

Academic Editor: Firstname Last-name

Received: date

Accepted: date

Published: date

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2021 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Modern Energy Cooking Services (MECS) - the ability to cook efficiently, cleanly, conveniently, reliably, safely and affordably [1] - are now regarded as an urgent human development priority. Globally, 4 billion people lack MECS, according to latest estimates [1]. Around 900 million people in Sub-Saharan Africa (SSA) cook with traditional solid fuels, such as firewood, charcoal and animal manure, and suffer 490,000 deaths per year directly attributable to smoke and pollution from 'dirty' cooking fuels, and the number grows every year [2].

44 SSA governments and the international development community have focused on
45 what MECS solutions can be provided at scale as soon as possible [1,3], and are con-
46 sistent with global ambitions towards a net-zero carbon economy.

47 A plethora of technology, business model and policy interventions are in early stages of
48 evaluation, but leading global organizations are focusing particularly on two classes of
49 proven clean cooking solutions: electricity and clean fuels in both liquid and gaseous
50 forms (e.g. LPG, bioethanol, biogas) [4–6]. Of these clean fuel choices, LPG is now at-
51 tracting much focus as a high priority, tenable and financeable solution for the next ten
52 years (and perhaps longer) in an effort to achieve Sustainable Energy Goal 7 (SDG7) on
53 universal energy access [1,4,7,8].

54 Access to LPG (propane, butane or a mixture of the two) is quickly implementable
55 at scale, as demonstrated by recent large-scale national efforts in India [9] and Indonesia
56 [10]. LPG scale-up can take advantage of proven technical, safety, policy and regulatory
57 best practices, as well as well-established market, business and financing models, suc-
58 cessfully implemented in high income and low and middle-income countries (LMICs)
59 [11]. LPG is used as a clean cooking fuel by 2.5 billion people already [12], representing
60 44% of total global LPG demand [13]. Nonetheless, global supply of LPG remains ample
61 and sufficient to meet the projected global demand for 2030 and following years. As of
62 2020, the SSA region is showing a large increase in LPG demand in Kenya and Nigeria
63 and a diverse set of smaller markets [13].

64 1.1. *How LPG is produced and how it could be produced renewably*

65 Though almost all LPG supply presently comes from fossil fuel operations of the
66 global oil and gas industry, there now exists the possibility that LPG could be produced
67 at scale on an economically viable basis, from renewable feedstocks widely available in
68 SSA countries [14]. Such renewably sourced LPG may be most easily referred to as bi-
69 oLPG or green LPG. BioLPG is chemically identical to presently marketed fossil LPG
70 [15]. To date, bioLPG production has occurred as a minor co-product of liquid biofuel
71 production from hydroconversion of vegetable oils and animal fats (HVO) in the US and
72 Europe [15,16]. However, new technical developments described in this paper (e.g. Cool
73 LPG) offer the prospect of producing bioLPG, in an economically feasible manner at
74 scale, from municipal solid waste (MSW) and agricultural residues, both of which are
75 available in more than sufficient quantities across SSA. For example, UNEP projects 244
76 million tonnes per year of MSW produced in Africa by 2025, growing from 125 million
77 tonnes per year in 2012 [17].

78 BioLPG for clean cooking presents many advantages: (a) at point of use, its emis-
79 sions are the same low level as those of fossil LPG, its chemical equivalent, and would be
80 protective to health; (b) it would be completely compatible with existing LPG distribu-
81 tion and user infrastructure [18]; (c) its adoption in LMICs would reduce deforestation
82 pressures from firewood and charcoal production and use; (d) compared to busi-
83 ness-as-usual use of traditional solid fuels, its emissions profile is significantly more cli-
84 mate friendly due to full renewability, even more so than fossil-derived LPG, which also
85 has an important climate protective role with respect to its negligible black carbon emis-
86 sions and limited CO₂ emissions due to high stove efficiencies [19–21]; and (e) it would
87 be a circular economy use of inevitable arisings from municipal solid waste management
88 and agricultural activities.

89 In terms of relevance to evolving, high priority global climate change mitigation
90 needs, net-zero carbon transition strategies that decarbonize existing energy pathways in
91 a financially sustainable manner have considerable benefits. In the evolution towards a
92 circular economy, economically viable production of renewably sourced bioLPG would
93 also be a route to supply climate friendly fuel to LPG distribution and user ecosystems
94 which already exist in almost every country and can be scaled up. Proven best practices
95 in policies, regulations, regulatory enforcement, technical standards, safety, and market /
96 business structures are in daily use worldwide and can be emulated. Investments in LPG
97 infrastructure and consumer equipment are in place and can be expanded quickly

[9,10,22]. Furthermore, bioLPG production in SSA LPG consuming countries would reduce use of foreign exchange for LPG imports. All these reasons make bioLPG consistent with the principles of a Just Transition [23], because bioLPG enables African national desires to scale-up LPG use to become supportive of the global urgency to transition to a green economy while achieving African desires to achieve clean cooking using LPG.

1.2 Aims and significance of this paper

The research community, the international development community and the private sector to-date have not focused on the potential of bioLPG (particularly to supply butane, a major part of SSA LPG demand) in a developing country context.

This study addresses the following two important questions not articulated by previous research: (1) Is it technically possible to produce LPG from renewable resources such as MSW and agricultural residues (bioLPG) at scale in SSA? (2) Is bioLPG production in developing countries economically feasible and implementable? In response to these framing questions, the paper presents a comprehensive methodology, and uses appropriate data and models, to evaluate bioLPG potential, according to the steps below.

First, this paper (a) defines the relevant enabling factors that a country must present in order for scoping of bioLPG project potential to have a positive result, and (b) screens SSA to identify a short list of countries where an initial scoping of possible projects might best be focused. The six countries which emerge from the country screening process are Cameroon, Ghana, Kenya, Rwanda, Senegal and Tanzania.

Second, this paper assesses those short-listed countries through the multiple lenses of key criteria that must be considered and coordinated: (a) technical processes; (b) feedstocks and their sufficient availability; (c) costs of construction and operation; and (d) financial feasibility considerations and financing sources. Based on those analyses, the paper then identifies a recommended priority list of five projects which merit detailed examination. Those five projects are located in Ghana, Kenya and Rwanda, and contemplate both MSW and agricultural residues as feedstocks.

Third, this paper presents initial analyses of the projected technical and economic performance of the five selected projects, and consideration of financing options.

Fourth, the paper offers recommendations on further research that can accelerate and strengthen bioLPG feasibility and justify implementation at scale.

2. Materials and Methods

2.1 Country screening and project identification.

2.1.1 Triage process to identify focus countries and candidate bioLPG projects

The paper focuses only on those SSA countries offering the critical mass of starting conditions justifying detailed analysis of bioLPG project potential. An objective, data-based triage process has been undertaken to enable identification of countries which present satisfactory initial conditions which comply with the criteria outlined below:

- *1st triage: National intentionality and action to develop the LPG sector:* Evidence of (a) national need for clean cooking, (b) stated intentions to scale up the national LPG sectors, and (c) planning and implementation steps to accomplish LPG sector scale-up. Application of these screens to SSA (see Table 1) identified six countries as candidates for deeper investigation of bioLPG project potential: Cameroon, Ghana, Kenya, Rwanda, Senegal and Tanzania.
- *2nd triage: Enabling environment and capability of political system:* Government commitment and support are of the utmost importance in order to induce the financing and implementation of an infrastructure system for biofuels. The literature is replete with emphasis on the importance and primacy of state policies and institutions. In Europe, studies note that the main barriers to renewable energy production in agri-

culture are frequent changes in policies, complicated legislatures, and a general perception of unpredictable national policy instruments [29,30].

Table 1: Screening and selection of SSA focus countries

Country Name	Has Major Clean Cooking Fuel Need ¹	Has 2030 Target for LPG Penetration ²	Has LPG Master Plan or Plan-in-Process ³
Angola		X	
Benin	X		
Burkina Faso	X	X	
Burundi	X		
Cabo Verde		X	
Cameroon	X	X	X
Central African Republic	X		
Chad	X		
Congo, Dem. Rep.	X		
Congo, Rep.	X		
Cote d'Ivoire	X	X	
Djibouti	X		
Egypt, Arab Rep.			
Equatorial Guinea	X		
Eritrea	X		
Eswatini			
Ethiopia	X		
Gabon		X	
Gambia, The	X		
Ghana	X	X	X
Guinea	X		
Guinea-Bissau	X	X	
Kenya	X	X	X
Lesotho	X		
Liberia	X	X	
Libya			
Madagascar	X		
Malawi	X		
Mali	X	X	
Mauritania			
Mauritius			
Morocco			
Mozambique	X		
Namibia	X		
Niger	X	X	
Nigeria	X	X	

150
151
152
153
154

Rwanda	X	X	X
Sao Tome and Principe	X		
Senegal	X	X	X
Seychelles			
Sierra Leone	X		
Somalia	X		
South Africa			
South Sudan	X		
Sudan	X		
Tanzania	X	X	X⁴
Togo	X		
Tunisia			
Uganda	X		
Zambia	X		
Zimbabwe	X		

¹ WHO Household Energy Database (2018 data) [24]; “X” indicates country has less than 45% clean fuel penetration.

² Van Leeuwen et al. [3] and revisions of Sustainable Energy for All Action Agendas. “X” indicates country has set a specific target for LPG penetration by 2030 or before.

³ Multiple sources [22,25–28]; “X” indicates country has an LPG-specific national master plan or the equivalent completed or currently in development (petroleum sector master plans that mention LPG were not deemed to qualify).

⁴ Tanzania is included in part because it is an integral part of the East African LPG economy and distribution network with Kenya and Rwanda. Tanzania’s LPG planning is at an earlier stage than its neighbours but includes focus on its major refugee populations and their surrounding communities.

In Africa, Kemausuor et al. 2018 [31] identifies the lack of regulatory policies and incentives as the main reasons for insufficient progress in the deployment of commercial biogas plants. Realization of the benefits of biofuels at minimum requires a high-level commitment to increase access to alternative modern cooking energy, a renewable energy policy and a commitment to solid waste management that is also linked to national climate change mitigation and adaptation action plans. A review of these requirements against the six countries that emerged from Triage 1 demonstrates that some countries meet these threshold conditions more fully than others. For instance, although renewable energy is an important part of Cameroon's plan to increase energy security, the lack of a proactive renewable energy policy limits progress in this area [32]. In Senegal, the legal framework that governs the solid waste management sector is inadequate and the lack of clarity regarding the specific laws that govern the sector creates an institutional environment that is difficult to navigate [33]. In Tanzania, there is currently no comprehensive national LPG plan (with defined key projects or schedules of targets) integrated into the national development strategy [34]. Within the bioenergy sector, establishment of an enabling environment is often a challenge because the policies and regulations needed to stimulate sector development are distributed across numerous policy areas such as waste handling, energy and agriculture, which results in a complex policy landscape that is difficult to coordinate [29]. Inter-sector coordination of ministerial activities must be facilitated and ensured by a high-level political commitment that sets out a clear vision within interacting sectors (e.g. land use, waste, agriculture, environment, finance, urban management). Such political commitment, often required at the level of the Head of Government, must convince financiers and investors that it will be stable enough through changes in government over the required life of investments in the sector. Stability and enforceability of law are paramount considerations. Three


of the six countries passing Triage 1, Ghana, Kenya and Rwanda, not only met the minimum requirements but also were able to exceed those minimum requirements in their current statuses of having enabling policy and regulatory environments sufficient to support the development of bioLPG projects.

- *3rd triage: Selection of technical process options:* Choice of technical options required simultaneous and interactive consideration of process feedstock needs and availability of suitable feedstocks in adequate quantity. The technical options and their triaging are described in more detail in section 2.2.
- *4th triage: Feedstock selection and identification of project possibilities:* Scanning of feedstock potential (viable quantities, siting, and notional economics of MSW or agricultural waste) was conducted in order to identify promising project types in Ghana, Kenya and Rwanda; this final triage yielded the results and five project choices analysed in detail in section 2.3.

2.2. Triaging technical pathways to bioLPG production

There are several main families of routes for bioLPG production, summarized in Figure 1. Categorisation is not always distinct, due to the variety of methods and feedstocks that can produce the same chemical intermediates and the variety of ways a given intermediate can be transformed into LPG. Process terminology follows standard usages.

Figure 1 – Main bioLPG production routes

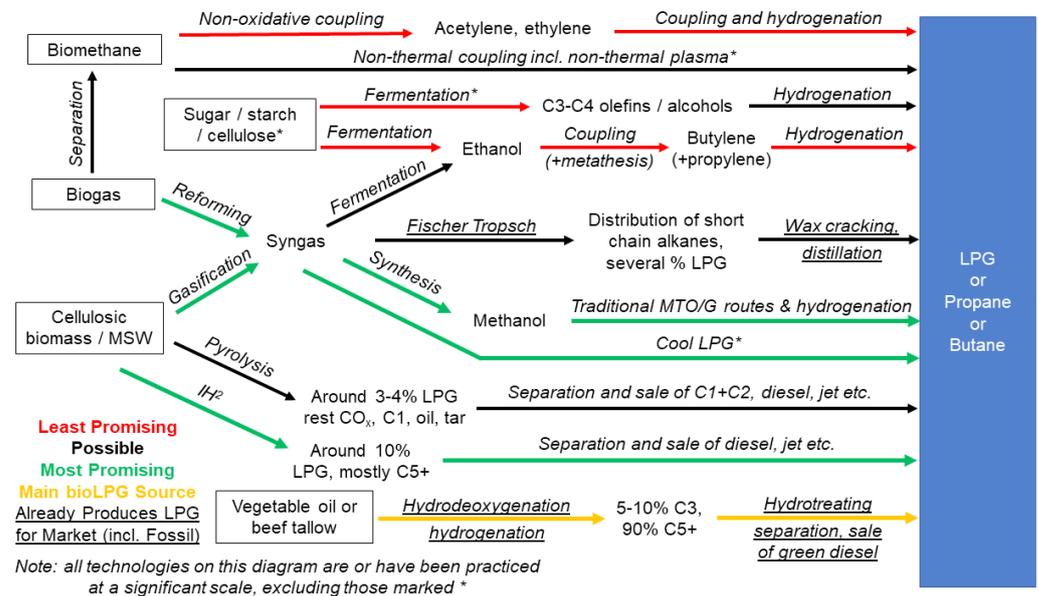

Here the technologies are categorised at a high level by common technological approaches or common chemical intermediates to chemically transforming organic feed material into precursors for LPG or directly into LPG. Figure 1 presents a map of choices. The categories are: (1) Fermentation: saccharides, lignocellulose or syngas to fuels or chemicals; (2) Hydrolysis and hydrodeoxygenation of triglycerides; (3) Direct thermochemical conversion of MSW; and (4) Waste to biogas and biogas conversion.

The criteria detailing why some routes are more promising than others are fully discussed in GLPGP 2020 [14]. The criteria include: i) Chemistry established, viable thermodynamics; ii) Feasible operating conditions (incl. available feedstock); iii) Production

of LPG versus other valuable products; iv) Complexity (incl. number of unit operations); v) Competing pathways (side reactions, contamination risks, degradation, coking); vi) Estimated time to market. Pathways shown in Figure 1 are listed as most or least promising on the basis of this ranking. The leading candidates per this scoring are AD+Cool LPG and MSW IH², both in terms of their overall scores and their ability to produce high amounts of LPG from feedstocks that are adequately available in the triaged focus countries (see section 2.3).

2.2.1 Fermentation

Fermentation of saccharides is a very widely practiced technology to produce ethanol biofuel from crops such as corn and sugarcane, but requires dedicated agricultural space for growing fuel crops, since saccharides are not waste products. Waste biomass, such as widely available lignocellulosic matter, can be fermented into ethanol with current technology but at relatively high expense [35]. Lowering the cost of lignocellulosic bioethanol technology is already a major target across the globe for production of bioethanol fuel. Notable alternative approaches include bioconversion of syngas (the product of gasification of organic materials) to ethanol. However, even though technology for converting ethanol into LPG is available (via ethanol coupling to butadiene or ethanol dehydration to ethylene followed by coupling and metathesis), the market value of the ethanol or olefin intermediates may be higher than that of the LPG produced. Furthermore, at present the only significant sources of ethanol for fuel purposes are dedicated fuel crops.

Fermentation technology exists to directly produce longer chain alcohols, which could be deoxygenated to LPG, but the same cost and realizable sales value challenges that apply to bioethanol also apply to longer chain alcohols [36].

2.2.2 Hydrolysis and hydrodeoxygenation of triglycerides

Conversion of triglycerides (fats, oils, tallow) to renewable diesel (HVO) is currently the only technology family that produces, as a secondary co-product, quantities of bioLPG commercially. However, considering that a low product fraction of LPG (10% by volume) is inherent to these processes, it is unlikely that this route will deliver significant quantities of bioLPG anywhere. Much larger volumes of triglyceride feedstock would need to become available, as well as assurance of economic viability for the renewable diesel produced as the major output of the processes.

2.2.3 Direct thermochemical conversion of MSW

While MSW can be converted to syngas, for example by gasification to feed a syngas to an LPG plant, several conversion technologies for going directly from MSW to fuel are being developed or already exist. Pyrolysis in general does not produce much LPG, although the IH² biomass to liquid fuels process being developed by Shell is an exception because it has been shown to produce up to 10% of LPG in the process. It is possible that IH² could be modified to increase the yield of LPG from MSW (see Figure 2), but no such findings have been announced to date. Economically viable, small-scale IH² plants would also be valuable, if and when developed.

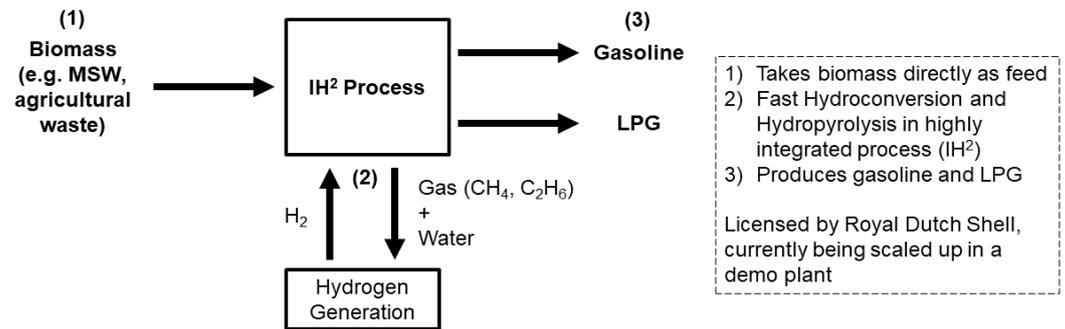


Figure 2 – High level IH² LPG process flow

2.2.4 Waste to biogas and biogas conversion

Biogas production by anaerobic digestion (AD) and landfill capture is also widely practiced across the globe with relatively mature technology. The methane in biogas can be separated out and reformed to higher chain length alkanes, via thermal or nonthermal routes, but selective activation of the methane C-H bond is extremely challenging. Thermal methane coupling is mostly being developed to add value to waste gases, whereas nonthermal methane coupling (such as DBD plasma technology) is expected to have competitive economics on smaller scales if and when it reaches higher stages of development. Biogas can also be reformed to produce syngas, either after methane purification or using newer dry or bi reforming technology, and LPG can be made from syngas via a variety of routes. Fischer Tropsch technology produces a small quantity of LPG byproduct, although the propane component is typically recycled with the goal of producing heavier liquid fuels. Selectively producing propane and butane and economically scaling down are two challenges facing bioLPG production by a Fischer Tropsch approach. Methanol-based routes to liquid fuels and products in the C₃/C₄ range are also industrially performed, although they do not generally aim to produce LPG and in many cases this approach is performed at very large scales [37]. Cool LPG is a process under development at the Gas Technology Institute (GTI) based on a methanol intermediate with the direct aim of LPG production using a scalable integrated process [37] (see Figure 3).

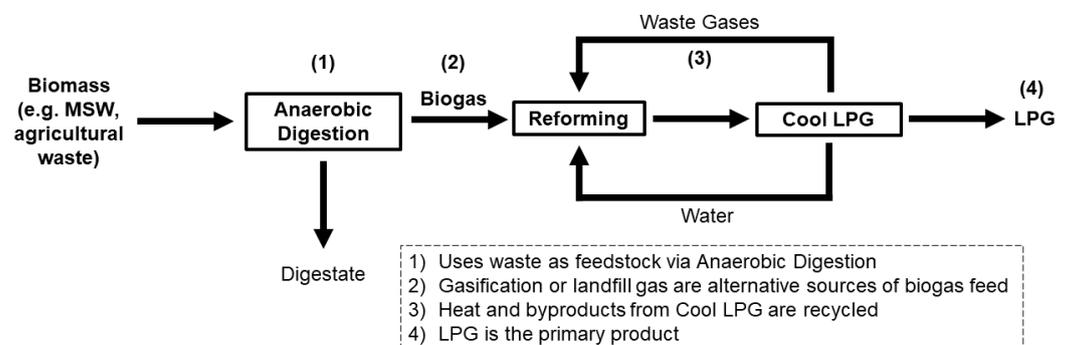


Figure 3 - High level Cool LPG process flow

2.3 Availability of appropriate feedstocks in triaged countries

Selection of feasible chemical process pathways was detailed in section 2.2 above, using economic, policy and physical availability criteria. Consideration of LPG production using fermentation routes was ruled out for economic reasons and on grounds of incompatibility with evolving land use policies in most countries. Consideration of LPG production using hydrolysis / hydrodeoxygenation routes was ruled out due to the low production volumes of propane produced per ton of feedstock (propane is a minor co-product of the processes), absence of butane production and raw feedstock insufficiency.

The feedstock requirements for the production of bioLPG at scale by thermochemical conversion of MSW and waste to biogas / biogas conversion to LPG were found to be acceptable from a policy point of view and possible to obtain widely at scale with acceptable economics. Relevant feedstock types and reference plant quantity needs in the three focus countries are summarised in Table 2.

Table 2. Types of potential feedstocks in the three focus countries and quantities required for a 10,000 tpa bioLPG reference plant

Conversion technology	Feedstock characteristics	Potential feedstocks	Volumes required for 10,000 tpa bioLPG	Comments
Catalytic thermo-chemical conversion	Heterogeneous organic/biomass feedstock. Single input feedstock could be an option (with improved biochar output) but the process can manage mixed feedstock including mixed MSW.	Biomass / MSW	~70,000 tpa feedstock	BioLPG is a minor volume co-product of the one implemented conversion pathway.
Biogas to bioLPG (biogas/syngas reforming)	Heterogeneous biomass suitable for Anaerobic Digestion (AD). Mixed biomass compositions can be used but different feedstocks give different yields of biogas. Consistent supply of biomass preferable for consistent running of AD. Desulphurisation of biogas required.	By-products of agricultural and livestock industries (field and processing residues); sewage and wastewater; organic fraction of municipal waste	~30,000 tpa raw biogas. Equivalent to approx. 160,000 - 500,000 tpa feedstock input (depending on type (food waste or biosolids such as animal manure))	Feedstock assessment carried out for preliminary production of biogas via AD.

2.3.1 Feedstock evaluation criteria

Potential feedstocks from agriculture and agro-processing (both crop and livestock related waste arisings) are evaluated by the following criteria: (a) agricultural potential by country and crop, e.g. scale of production and processing operations; commercial/plantation productions vs. small holder growing, (b) access to sufficient feedstock at centralised points, without the need for developing extensive feedstock collection systems, (c) estimated cost of feedstock (where it is sold), (d) potential competition for resources, where feedstock may be utilised locally or earmarked for future projects, (e)

sustainability issues associated with particular crop wastes, and (f) supportive policy mechanisms for agriculture and energy.

Urban wastes (MSW, sewage and sludges from wastewater treatment) are evaluated according to the following criteria: (a) existing management systems for MSW (e.g., degree of waste management at landfill sites or dumps; pre-sorting of waste or requirement for waste sorting as a pre-process to bioLPG production), (b) existing infrastructure for managing urban waste, (c) level of investment required to develop infrastructure to bring urban waste to a centralised point for conversion to bioLPG, (d) the organic or biodegradable fraction of the waste (i.e., organic matter fraction, or food waste content), (e) the cost of feedstock, and (f) supportive policy mechanisms for waste management and energy provision.

In industrialized countries, minimization of landfilling and value recovery through material recycling and energy-from-waste are often priorities, frequently supported by separation of waste at source, by households and businesses. In low-income countries mixed waste collection is typical and 93% of waste is dumped in simple landfills [38]. For both MSW and agricultural sources, the selection of feedstock for the production of bioLPG must consider production points and points of distribution for the bioLPG. Rural environments can present relatively wide dispersal of bioLPG feedstock and bioLPG user populations, thus requiring increased feedstock collection and LPG distribution costs. These economic factors suggested the importance of siting a bioLPG point of production in adequate proximity to both feedstock resources and bioLPG customers, i.e., closer to urban communities or centralized aggregation points for agricultural residues.

2.3.2 Results of feedstock analyses for Ghana, Kenya and Rwanda

The focus for project identification was placed on Ghana, Kenya and Rwanda, and the feedstocks available which can support the Cool LPG and IH² processes (see section 2.3 for reasons why other processes were not considered). Table 3 summarises the feedstocks which were reviewed based on the feedstock evaluation criteria (section 2.3.1).

Table 3. Feedstocks reviewed for bioLPG production at scale in Ghana, Kenya and Rwanda

Country	Feedstock potential	References
Ghana	Agro-processing residues, field residues and waste from palm oil, fruit, cocoa, maize, rice, millet, sorghum, cowpea, cassava, soybean	[39–41]
	Urban waste (sanitary waste and MSW)	[42–44]
Kenya	Agro-processing residues, field residues and waste from coffee, pineapple, sugarcane refining, cassava, mango, sisal and livestock industries	[31,45,46]
	MSW	[47]
Rwanda	Agro-processing residues, field residues and waste from coffee, cassava, fruit processing and brewing industries	[48]
	Urban waste (sanitary and MSW)	[49,50]

Analysis of feedstock types, their locations, quantities potentially available, and logistics resulted in the definition of five projects for detailed analysis: (1) Kenya (Thika district)

344 agricultural waste to bioLPG via the Cool LPG process; (2) Ghana MSW to bioLPG via
345 the IH² process; (3) Ghana MSW to bioLPG via the Cool LPG process; (4) Rwanda MSW
346 to bioLPG via the IH² process; (5) Rwanda MSW to bioLPG via the Cool LPG process.

347 2.4 *The 'enabling environment' in Ghana, Kenya and Rwanda*

348 At the macro level, the triaged countries at the focus of this analysis (Ghana, Kenya and
349 Rwanda) demonstrate a strong commitment to relevant international agreements and
350 goals, including the Paris Agreement, the Africa Vision 2063, and the UNSDGs. They
351 express a commitment to ensure access to modern and environmentally friendly energy
352 for all. They also have expressed a strong commitment to reduce greenhouse gases
353 (GHGs) emission, increase access to clean energy, create opportunities to increase in-
354 vestment in renewable energies, and improve waste management (e.g. [51–54]). They
355 have also been actively mainstreaming their nationally determined contributions
356 (NDCs) into national development plans and sectoral policies to ensure realisation. For
357 instance, in Ghana, a notable increase in the net emissions from waste has led to a com-
358 mitment to mitigating actions [52]. Similarly, in Rwanda, the updated NDC offers a
359 strong case and an elaborated plan for waste-to-energy (WtE) projects as its waste man-
360 agement strategy [54]. In Kenya, the Energy Act (2019) outlines their national policy in-
361 tention to facilitate the development of bioenergy (biofuel and biogas) and to collaborate
362 with municipal authorities to make WtE projects economically feasible [55]. Ghana's
363 Draft National Energy Policy (2020) also recognises the WtE potential of agricultural
364 residues and agro-based industries [56].

365 To attract private sector capital to complement public sector capital, energy policies
366 also must have the characteristics that nourish market-based and investor-oriented solu-
367 tions such as green funds and de-risking programmes. Some countries have taken
368 measures to integrate policy frameworks that combine direct policies with more system-
369 ic ones, such as feed-in tariffs. For instance, both Rwanda (National Energy Strategy)
370 and Kenya (Energy Act 2019) have developed policies that aim at a systemic transition
371 towards modern, clean energy sources. These policies form part of more extensive policy
372 frameworks that take into account the cross-cutting requirements of renewable energy
373 and address economic and socio-ecological dimensions [57]. Rwanda's National Energy
374 Strategy includes long-term strategies such as support for research and development on
375 renewables and recognises its cross-pollinating capacities in setting up capacity-building
376 programmes. This more comprehensive, policy integration approach, however, is not
377 the case for all countries in SSA and their relevant sectors. Although the energy sector is
378 often adequately structured to attract investment, other sectors, particularly waste
379 management, tend to be fragmented and incoherent. Most SSA countries do not have a
380 reliable system in place for waste management; the environment policy is weak, and
381 there are no clear policies on the use of renewable energy from waste [17]. Even in Ken-
382 ya, one study notes that the sector suffers from a lack of government enforcement of ex-
383 isting regulations and duplication of responsibilities [58].

384 Coordination underpins policy coherence and plays an essential role in creating an
385 enabling environment. The risks associated with an uncoordinated approach include
386 Balkanized and uncoordinated policies, perverse incentives, inefficient use of finance,
387 competing narratives and public distrust [59,60]. WtE transition literature identifies poor
388 inter-ministerial coordination as a major hindrance to private sector involvement and
389 contribution [61]. Thus, some governments are taking steps to ensure inter-agencies and
390 cross-sectoral coordination. For instance, Rwanda has high-level authorities that are
391 mandated to work closely with multiple government agencies and facilitate coordina-
392 tion among the stakeholders, including the private sector [62]. The Kenya Climate
393 Change Act (2016) [63] mandates establishment of a National Climate Change Council
394 that the President chairs, with cabinet secretaries representing the environment, eco-
395 nomic planning, treasury, and energy ministries. The Act also requires representation on
396 the Council from civil society and the private sector.

3. Results

3.1 Cost estimates and financial feasibility considerations for the identified bioLPG plant projects

This section presents (a) Techno-Economic Assessment (TEA) estimates of capital and operating costs for various bioLPG production plant sizes; (b) feedstock cost estimations and (c) the economic / financial modelling and finance sourcing strategies for the five pilot project possibilities in Ghana, Kenya and Rwanda identified by the triage process set forth in section 2.1 Many of the model input variables are subject to market changes. The results presented in this paper were based on data gathered in mid 2020. However, readers are encouraged to source current data and insert them into their version of the model methodology, in order to create current, country and project specific projections.

3.1.1 General framework for cost estimation

BioLPG production from biogas or syngas is in its early days, so construction costs and operating costs of the reference size plants can presently only be indicated using accepted estimation techniques. However, several factors should be noted: (a) the conceptual process flow diagrams of the Cool LPG and IH² processes delineate stages of the process which are well-known technology up to the final LPG-producing reactor, thus making the overall plant construction estimates likely to be quite accurate, and (b) the non-feedstock operating cost estimates, including the costs related to the innovative catalysts used in the final conversion steps of both processes, are based on published data for similar processes and are therefore not likely to have huge inaccuracy. Therefore, the order of magnitude of the projected costs presented in this analysis is very likely correct. However, detailed testing and scale-up is required to arrive at firm and precise cost knowledge. The feedstock costs, involving sourcing of wastes and preparation of feedstock, are assessed as a separate element of operating cost, and are highly dependent on local conditions.

The two processes selected for cost analysis were Cool LPG (the LPG-focused process variant of the Cool Gas family of reforming technologies) and IH², which both have the two unique advantages of (a) producing high proportions of LPG from an economically efficient reforming route and (b) being highly suitable for processing the feed-gas-producing potential of the MSW and agro-waste widely available in SSA in quantity and existing in an as yet unexploited status. Even though reference is made to countries of identified projects, capital and operating costs are generic to the processes and not project-specific or country specific. These costs are defined and estimated in section 3.1.2. Feedstock costs will be country and site / project specific, and are defined and estimated in section 3.1.3. Details of the sources of cost estimation methods can be found in the Supplementary Information.

3.1.2 Capital and Operating Costs (not including feedstock) of IH² and Cool LPG Plants in Ghana or Rwanda

The projected capital and operating costs for IH² and Cool LPG plants of three different sizes (expressed in Kilo Tonnes per Annum (ktpa)) are summarized in Table 4 and Table 5, with feedstock costs excluded. Categories of operating costs listed in the tables below include annual expenses such as labour, electrical power and maintenance.

Table 4 - Capital and operating costs of an IH² plant in Ghana or Rwanda before feedstock considerations.

	Capacity 1 (25 ktpa)	Capacity 2 (10 ktpa)	Capacity 3 (5 ktpa)
BioLPG produced (ktpa)	25	10	5
Annual MSW input required (ktpa)	167	67	33
Total capital costs (US\$ million)	188	109	72

Operating cost (US\$ 000/year)	13,503	7,107	4,611
---------------------------------------	---------------	--------------	--------------

Additional capital expenditure (CapEx) savings can be anticipated for the Cool LPG process, by comparing capital investment experiences of existing methanol production plants, which are technologically similar to Cool LPG. CapEx for typical small methanol plants are in the range of US\$ 19–30 million (25 ktpa), US\$ 8–12 million (10 ktpa) and US\$ 4–6 million (5 ktpa)—between 50–65% lower than the costs for Cool LPG estimated here [64]. The CapEx estimates for these methanol plants are significantly lower because of the economic benefits of modular construction technology used to facilitate small plant construction. Modular technology allows construction and preliminary testing of a plant in a centralized location, and then transportation of the plant in one or several sections to the end-use site.

The CapEx projections in Table 5 do not incorporate an adjustment factor reflecting the probable lower cost resulting from using integrated modular technology. The real cost of a modular small-scale plant of this type could be expected to be around 65% of the scaled plant costs shown in Table 5 [65]. Therefore Cool LPG CapEx (but not the AD plant CapEx) is adjusted downward by this factor in the case studies shown in Table 6.

Table 5 - Capital and operating costs of a Cool LPG plant in Ghana or Rwanda before feedstock considerations.

	Capacity 1 (25 ktpa)	Capacity 2 (10 ktpa)	Capacity 3 (5 ktpa)
BioLPG produced (ktpa)	25	10	5
Annual MSW input required (ktpa)	676	270	135
AD plant capital requirement (US\$ million)	41	16	8
Cool LPG capital requirement* (US\$ million)	46	24	15
Total capital costs (US\$ million)	86	40	23
Operating cost (US\$ 000/year)	3,930	2,440	1,680

* Actual capital cost requirements may be lower, as low as 65% of the estimates presented in the table

3.1.3. MSW for IH² or Cool LPG in Ghana and Rwanda

The IH² process can utilize a wide range of feedstocks. However, given the necessary large scale of processing plant, the analysis has focused on MSW, representing a stream of organic materials typically available at scale and throughout the year. Initial review demonstrated that major cities in Ghana (Accra, Kumasi, Tamale) and Rwanda (Kigali) produce sufficient MSW to support an IH² plant. MSW can also be a useful feedstock for Cool LPG, with the digestible fraction used to produce biogas via AD. In this paper, the analysis of MSW feedstock costs for the two processes differs only in assumptions about the separation step, because a narrower fraction of the waste is needed for AD.

The quantity of organic materials recoverable per day was calculated from records of total mixed waste delivered to landfill sites serving major urban centres. multiplied by the percentage of the organics fraction typical for those locations, based on waste characterization studies. For example, the Tamale Metropolitan Area is the largest city in northern Ghana, with an estimated population of 950,000 people. The Tamale Landfill receives about 500t waste per day, with an organic fraction of 58.6% [43]. Waste composition does not seem to vary significantly: Miezah and colleagues (2015) report on several surveys made in Kumasi, Ghana within the wet and dry seasons that did not show any trend in variation of the composition and quantity of MSW. Kigali, the capital city of Rwanda, has a population of approximately 1.2 million people, currently serviced by one landfill site, an open-air dumpsite at Nduba opened in 2012. Around 1900t of waste

479 are generated in Kigali per day, with between 400 and 800t of unsorted MSW delivered
480 to Nduba [66,67]. The delivered MSW is high in organic content (food and green waste
481 account for 70%). For MSW, the raw feedstock cost is termed a “gate fee” or “tipping
482 fee”. This often represents a payment made by the local waste authority to a provider of
483 waste management services, usually to cover the costs of treating the waste, whether for
484 landfill disposal or value recovery [68]. However, internationally, gate fees vary widely
485 as they can be used as policy instruments to incentivize desired practices. Where the
486 gate fee is the waste management operators’ main source of income, they might typically
487 be paid a gate fee reflecting the expected cost per tonne of operations. Where the opera-
488 tor is recovering significant material or energy value from the waste, the local waste au-
489 thority may seek to charge for the waste, seeing it instead as a valuable resource. The
490 analyses for both Ghana and Rwanda explore a range of gate fee values, from US\$ -10 to
491 +10/t. MSW is typically collected by the local waste authority, at their expense, from lo-
492 cal sites across a city in small-medium sized lorries, which then deliver it to a waste
493 transfer station located adjacent to the city. Data was obtained for Ghana for onward
494 transport of waste from the transfer station to the treatment site, in large 30 tonne haul-
495 age trucks, estimated to cost \$6/t (for the 72km return journey) (waste management
496 company, pers comm).

497 The appropriate organic waste fraction will need to be separated out and processed
498 for input to the bioLPG plant: for IH² this is simply all organic material; for input to AD
499 for Cool LPG, only the biodegradable fraction is used. Material Recovery Facility (MRF)
500 is the generic term for the sorting, processing and recycling stage of waste management,
501 with “dirty” MRF the term for an MRF handling unsorted MSW [69]. MRFs range from
502 low-technology systems mainly using manual hand-picking to high technology facilities
503 with multiple automated stages, sensing and extracting individual material types. The
504 costs of waste sorting have been estimated based on analysis in the international litera-
505 ture. Pressley et al. [70] developed a process model to represent both clean and dirty
506 MRFs, including purchase and maintenance of equipment, labour, energy, and the costs
507 associated with land procurement and building construction. A simple dirty MRF is es-
508 timated to cost \$23.6/t. Once separated out, the organic materials may need some
509 pre-processing. For IH², the material is assumed to be shredded. Stapf et al. [71] estimate
510 the preparation costs to produce a secondary fuel range from 5.00 – 15.52 €/t. No
511 pre-processing is assumed for the biodegradable waste going to AD [71].

512 3.1.4 Agro-residues for Cool LPG in Kenya

513 The Cool LPG process is modelled for this paper as using biogas, derived through
514 AD from biodegradable agricultural residues. The Kenyan Government seeks to estab-
515 lish six agro-processing hubs across the country [72]. One is planned for Thika, a
516 sub-county approximately 42km from Nairobi. A comparatively large quantity of bio-
517 degradable organics is available in the region, from food waste, pig slurry, residues from
518 food production and also from the organic fractions of MSW.

519 A particular opportunity was identified as an ‘anchor’ supplier: a large pineapple
520 processing facility owned by Del Monte Kenya Limited (Del Monte) which processes
521 1500t of pineapple per day. The total agricultural wastes are estimated to be 800,000 tpa
522 [73], with the pineapple processing plant producing total solid wastes of 260,000 tpa. In
523 addition, twelve flower farms produce flower waste of almost 22,000 tpa [74] and coffee
524 processing residues amount to 8000 tpa of pulp [75].

525 The total organic waste available for an AD plant from agro-sources in Thika is esti-
526 mated at 302,525 tpa, with little seasonal variation, due to effective irrigation and use of
527 greenhouses for flowers. Pineapple waste from the Del Monte processing plant, the
528 flower farms, and the coffee estates currently has no costs attached to it, based on exist-
529 ing evidence in the literature. However, farmers and agro-processing plants may levy a
530 small fee once they realise there is a value associated with the waste. A shadow price of

531 approximately \$14/t has been suggested [76].

532 To capitalize on the Del Monte site as an anchor supplier, the AD plant is assumed to
533 be located close to the pineapple processing plant and other waste could be transported
534 there: a collection radius of approximately 15-20 km would be required. Del Monte
535 feedstock is assumed to be transported up to 2km; the rest of the feedstock would be
536 transported an average of 10km. Organic waste transportation costs are estimated at
537 \$0.28/t-km (not including labour costs) [77].

538 Feedstock processing may be necessary, to prepare this mixed set of materials into an
539 appropriate feed for the AD plant. However, this just involves mixing the various feed-
540 stock elements together to ensure the right consistency and C:N ratio and may also in-
541 volve the addition of water. The feedstock material would also be screened for contami-
542 nants, such as plastic and grits at this stage. As discussed above, some elements of feed-
543 stock cost, as seen by the receiving bioLPG plant, are heavily influenced by decisions of
544 the agro-processors or waste authorities. Alternative feedstock cost assumptions are a
545 necessary part of scenario analysis for overall investment analysis and are summarised
546 in Table 6.

547 3.2. Candidate project financial models and their results

548 Each pilot project has been subjected to economic and financial modelling to deter-
549 mine potential returns to prospective funding sources (Funders). Table 6 presents a
550 modelling of capital expenditures and operating expenditure costs, for the five defined
551 projects in Ghana, Kenya and Rwanda. The key assumptions used in the model are as
552 follows:

- 553 1. A bioLPG plant capacity of 10,000 tpa is modelled for AD + Cool LPG. A bioLPG
554 plant capacity of 25,000 tpa (the preferred size for IH² economies of scale) is mod-
555 elled for IH².
- 556 2. The capital cost of the 10,000 tpa AD + Cool LPG plant is projected at US\$ 32 million,
557 which is the US\$ 40 million capital cost for a 10,000 tpa plant presented in Table 5,
558 with the US\$ 24 million Cool LPG component adjusted downward by the 65 % ad-
559 justment factor described in section 3.1.2. The capital cost of the 25,000 tpa IH² plant
560 is projected at US\$ 188 million, as presented in Table 4, Capacity 1.
- 561 3. The waste input is 270 ktpa for the AD + Cool LPG plants (see Table 5, Capacity 2 –
562 *Annual MSW input required*). The waste input is 167 ktpa for the IH² plant (see Table
563 4, Capacity 1 - *Annual MSW input required*).
- 564 4. The imported fossil LPG prices against which bioLPG must compete are analysed for
565 LPG delivered in bulk to filling plants (a) located in/near Nairobi, Kenya, US\$
566 779/tonne; (b) in/near Accra, Ghana, US\$ 796/tonne; and (c) in/near Kigali, Rwanda,
567 US\$ 903/tonne (higher fossil LPG logistics costs due to Rwanda being land-locked).
568 These costs (as of mid 2020) includes, (i) for Kenya and Rwanda, the average historical
569 Saudi Aramco Contract Price for butane and, (ii) for Ghana, the average historical
570 ex-refinery and import parity price for LPG; ocean transportation; terminal and han-
571 dling charges at the port; land transport; miscellaneous costs, duties and levies.
- 572 5. Gasoline is the main product produced by the IH² process and gasoline revenue is
573 assumed at US\$ 800/tonne.
- 574 6. Gating/tipping fees might be received or be paid for MSW feedstock. Table 6 shows
575 results from modelling gating fees ranging from receipt of US\$ 10/tonne to payment
576 of US\$ 10/tonne.
- 577 7. A conservative capital structure with 35% bank/commercial debt @ a 10% interest
578 rate¹, 40% concessional debt from multilateral financial institutions (MFIs) and de-

¹ Sovereign debt information on Bloomberg + risk premium

velopment banks @ 8%², and 25% equity @ a 20% required internal rate of return (IRR). The blended interest rate is 8.93%, and the blended cost of capital is 11.7%.

8. An exit value of 5 times Earnings Before Interest, Tax, Depreciation (EBITDA) was used to reflect the value of the bioLPG plant's income generating capacity in outer years.
9. Borrowings starting in the first year, with only interest paid in the first year, and then principal and interest starting at the end of the second year.

Table 6 - Financial characteristics of the five bioLPG pilot projects

Triage Ranking	2	5	3	4	1
Country	Kenya	Ghana	Ghana	Rwanda	Rwanda
Case	Agro-Residue AD+Cool LPG	MSW IH ²	MSW AD+Cool LPG	MSW IH ²	MSW AD+Cool LPG
BioLPG Plant Capacity (tpa)	10,000	25,000	10,000	25,000	10,000
BioLPG Plant Capex (US\$ millions)	32	188	32	188	32
Waste input (ktpa)	270	166	270	166	270
BioLPG Price (US\$ / tonne)	750	750	750	850	850
Fossil LPG Price (US\$ / tonne)	779	796	796	903	903
Gasoline Price (US\$ / tonne)	NA	800	NA	800	NA
Best Case (High IRR, tipping fee income)					
Tipping Fee (US\$ / tonne)	10	10	10	10	10
IRR (US\$ 750 / t)	29.0%	13.2%	30.1%		
IRR (US\$ 850 / t)				15.8%	34.9%
Base Case					
Tipping Fee* (US\$/t)	0	0	0	0	0
IRR (US\$ 750 / t)	14.0%	11.3%	15.4%		
IRR (US\$ 850 / t)				12.3%	3.5%
Worst Case (Unattractive IRR, tipping fee cost)					
Tipping Fee* (US\$/t)	-7	-10	-10	-10	-10
IRR (US\$ 750 / t)	(negative IRR)	7.6%	(negative IRR)		
IRR (US\$ 850 / t)				8.6%	(negative IRR)

² Conservative, based on conversations with DFIs, such as USDFC (formerly OPIC), FMO, and Swedfund using LIBOR + 400-600 basis point premium, depending on country risks and project risks

*Tipping fee: cost of waste collection/management/tonne; positive if plant is receiving a fee, negative if the plant is paying a fee; tpa = tonnes per annum; ktpa = kilo tonnes per annum

All five projects offer acceptable IRRs in the Base Case when the bioLPG is priced US\$ 40-50/tonne below the forecasted fossil LPG market price in the country. All five Best Cases project significantly improved and attractive IRRs for AD + Cool LPG projects (rankings #1, #2 and #3), because of their much higher sensitivity to improvements in feedstock cost (due to tipping fee income) as compared to the IH² projects. The IH² cases are only economically interesting at larger scale (e.g., bioLPG output of 25,000 tpa).

The economic returns over the 12-year projection periods demonstrate that the projects can comfortably service blended debt in the 10-year to 15-year windows, while generating acceptable IRRs for equity in the 'Base Case' scenarios and attractive IRRs (as much as 35 % IRR) in the 'Best Case' scenarios. The four most important variables that drive financial performance are the cost of the plant, the bioLPG sales price, the cost of the feedstocks, and the tipping fee.

3.3. Financing issues and projected LPG supply infrastructure and fuel costs

Below are key issues and findings regarding scope and availability of finance, as of mid 2020:

- a) The capacity of local commercial financial institutions to lend is often constrained by national regulatory limits, and when faced with attractive local, lower risk investment alternatives (such as government securities). Risk mitigation assistance then becomes critical to induce local capital to flow.
- b) The consensus need of potential major local funders (Ghana Infrastructure Fund, the Development Bank of Rwanda, Stanbic, Ecobank, Kenya Commercial Bank, and Databank in Ghana, Kenya, and Rwanda) was for development finance institutions (DFIs) to assist in various forms: grants, technical assistance (TA) for capacity building, investment capital (debt and equity), first-loss guarantees, investment insurance and other risk mitigation facilities.
- c) The mobilization of international blended financing can be used to "crowd in" meaningful amounts of local funding (OECD: Blended Finance Funds and Facilities), as detailed in LPG Master Plans developed for Kenya, Rwanda, and Ghana [26–28]. The specific focus and needs of funding sources must be identified and targeted [78,79].
- d) DFIs are often the most important early money and risk mitigation sources because they are willing to accept less certainty than the private sector due to their development mandates and offer longer tenors (up to 20 years). Additionally, through their TA, guarantees and first-loss protection, DFIs often enhance the expected economic performance and de-risk investments.
- e) There is a wide range of potential public sector financial support for LPG projects. These include development/aid agencies (e.g., FCDO/UKAID, USAID, SIDA) for grants and TA; DFIs (e.g., FMO, IFC, KfW, PROPARCO, Swedfund, and USDFC) for capital and risk products; and development banks (e.g., AfDB and local development banks) for capital and risk products.
- f) Leading DFIs (AfDB, FMO, IFC, Swedfund, and USDFC) have indicated preliminary interest in funding bio-related LPG value chains and LPG-related infrastructure.
- g) Based on all the above, it is concluded that there is financial institutional interest and capability to explore the funding of Cool LPG projects in Ghana, Kenya and Rwanda at a commercial scale, assuming adequate evidence from well-conducted project feasibility studies.

The cost and finance findings show that bioLPG could be robustly competitive to fossil LPG if economic variables presented in Table 6 fall in forecasted ranges. This is im-

portant because it means that further investment in infrastructure for the LPG supply chain and for enabling consumers to use LPG is an excellent use of public and private funding capacity that is likely to be available. Supply chain capacity and user equipment would be able to take advantage of the current and forecast surplus of conventional LPG and then transition to large-scale use of bioLPG as it might become available toward the SDG 7 2030 target.

3.3.1 Indicative estimates of capital expenditures (CapEx) required to create physical LPG capability for an additional 500 million new users in Sub-Saharan Africa.

It is worth noting the relatively modest scale of CapEx required to create LPG user capability (excluding fuel) for incremental, large numbers of the SSA population. The CapEx needed to scale up LPG supply and demand in SSA were modelled using comprehensive data from national LPG sector studies and plans for four countries across West, East and Central SSA (Ghana, Kenya, Rwanda and Cameroon) [25–28]. The indicative summary data are presented in Table 7.

The *industry CapEx* includes all critical domestic LPG supply chain assets needed to serve national LPG demand: LPG cylinders, cylinder filling plants, bulk storage, cylinder depots, and bulk and cylinder transportation. The industry CapEx estimates exclude country-specific investments related to the production of LPG (primary oil and gas production, processing and product storage) or import of LPG (import terminals and associated import terminal primary storage). In countries that require it, LPG import infrastructure investment (i.e., import terminals) would add up to approximately 10% to the total industry CapEx need. *Industry CapEx* provides the investment required to serve the household market as well as commercial, institutional and industrial LPG users as demand expands in those market segments.

Table 7. Industry and consumer capital investment for serving new LPG users (US\$)

National Averages	Per New User (Based on the 4 Countries Studied)			For 500 Million New Users, 120 Million Households		
	Industry CapEx	Consumer CapEx	Total CapEx	Industry CapEx	Consumer CapEx	Total CapEx
Low	\$27.6 per new user	\$8.8 per new user	\$36.5 per new user	\$13.8 bn	\$4.4 bn	\$18.2 bn
High	\$37.8 per new user	\$15.0 per new user	\$52.8 per new user	\$18.9 bn	\$7.5 bn	\$26.4 bn

The *consumer CapEx* is the investment needed for households to become capable of using LPG. It is the per new user allocation of the cost of supplying an average size household with an LPG double-burner stove, a hose for connecting the stove to a LPG cylinder and a pressure regulator that enables consistent, precise control over the LPG flame. The assumption on household size is an average of 4.2 persons based on the countries studied. For more detail on the assumptions underpinning the results presented in Table 7, please refer to Table S1.

Based on the Table 7 data regarding the four study countries, total CapEx required to provide LPG to 500 million new SSA users is estimated to be in the range of US\$ 18.2 billion to 26.4 billion, assuming an average household size of 4.2 and a primary focus on urban/peri-urban areas (see Table S1), The total CapEx estimate comprises US\$ 13.8 to

678 8.9 billion incremental capital expenditure by industry (supply-side) and US\$ 4.4 to 7.5
679 billion incremental capital expenditure by households (demand-side).

680 As another approach to calculating clean cooking financing requirements by 2030, it
681 should be noted that ESMAP 2020 estimates the required CapEx and Fuel investment for
682 achieving Tier 4 clean cooking for 263 million SSA households through 2030 at US\$ 452
683 billion, which can be extrapolated to US\$ 206 billion for 120 million SSA households [1].

684 Although other SSA countries will differ in their national circumstances, the range
685 of projected investment needs in the four countries whose data were used for Table 7 is
686 narrow enough and low enough to be useful in justifying serious consideration of LPG
687 sector development in order to accelerate efforts to achieve SDG 7. It also helps explain
688 why other countries in South-Asia and Latin America have been able to achieve sub-
689 stantial scale in implementation of LPG for clean cooking [9,10,80].

690 4. Discussion

691 BioLPG produced domestically by low and middle-income countries is potentially
692 an important element in harmonizing urgent health, climate, clean cooking and envi-
693 ronmental agendas in countries that currently rely heavily on polluting solid cooking
694 fuels. Furthermore, many developing countries have expressed desire for LPG sector
695 development assistance. The prospect of bioLPG at scale could reduce tensions around
696 climate justice and national sovereignty arising from development partners' concerns
697 about fossil-derived LPG.

698 The linking of bioLPG to feedstock from waste management adds an element of
699 complexity to its development. Two projects (a waste handling project and a bioLPG
700 production project) must be synchronized in planning, contractual connection and fi-
701 nancing, as well as provision of an adequate enabling environment from the govern-
702 ment. However, there are many examples of successful linkage between waste handling
703 and energy plants, with financial value of energy recovery providing the impetus, but
704 leading to a wider set of social and environmental benefits. The urgent need for modern
705 waste handling in rapidly growing SSA cities creates an incentive for using the energy
706 content of the waste [67]. Although discussion of the highest and best use of energy re-
707 coverable from MSW and agricultural wastes was not the main focus of this paper, an
708 initial analysis of data from recent waste to energy (WtE) projects in China and Saudi
709 Arabia fully described in the GLPGP 2020 report [14], shows that biogas produced from
710 waste handling systems provides cooking energy to more households when converted
711 into LPG than when converted into electricity.

712 The technical options for bioLPG production have been presented and considered
713 in tandem with the feedstock possibilities. The needed enabling environment conditions
714 have been outlined in relation to the realities of project development and viability. The
715 construction scope and costs, and operating costs, have been detailed. All these elements
716 are relatively stable in their characteristics. What is most volatile and difficult to present
717 in reliable and stable detail are the availability, amount, conditions and sources of fi-
718 nance for the projects presented or any other project. Finance conditions can be very
719 volatile.

720 This paper describes analytical methodologies, enabling criteria and
721 non-site-specific technical and economic elements that can be the basis for preparing any
722 SSA country to consider, plan and implement bioLPG capability that could serve grow-
723 ing national LPG needs. The countries (and projects in those countries), which were ex-
724 amined in detail in this paper, were selected because of their potential to successfully
725 develop bioLPG faster. That first generation of successful projects would produce learn-
726 ings from which other countries in the African continent and elsewhere could benefit.

727 728 4.1 Next phases of bioLPG development

729

This paper bridges the world of research and the world of practice and implementation. Its conclusions are robust enough to warrant provision of adequate funding to carry out the next phases of bioLPG development. The next phases are a standard series of steps that should be carried out to de-risk and progress a new industrial technology towards deployment:

1. Fund next steps of technical process development and refinement, which is a general need and not site-specific.
2. Fund and carry out detailed feasibility studies for bioLPG demonstration plants in carefully selected sites.
3. Finance and build demonstration bioLPG plants, incorporate learnings into commercialization planning.
4. Develop and put into service commercially viable bioLPG plants across SSA.

Additional research activities whose results could markedly shorten time to plan, finance, build and commission bioLPG projects in SAA, should be focused to achieve:

1. Stimulation of SSA governments to explore bioLPG as a solution, with coordination across relevant ministries and agencies and complementary stimulation of TA funding
2. Stimulation of international development organizations and funding sources to support bioLPG as a solution and to engage with SSA governments to assess and develop bioLPG production capacity and related feedstock projects.
3. Stimulation of finance institutions to build human capacity and decision-maker interest in serving a bioLPG project market and reducing risk premiums included in finance pricing.
4. Stimulation of planning and funding of urban MSW capacity, as feedstock for bioLPG.

5. Conclusions

This paper accomplishes three overarching, important goals: (1) it details the key elements of technical feasibility to produce bioLPG from renewable resources such as MSW and agricultural residues at scale in SSA and, as a collateral benefit, to valorise rapidly increasing MSW production in Africa; (2) it provides a comprehensive methodology to assess bioLPG project feasibility in SSA, presenting detailed techno-economic assessments of five candidate pilot projects across countries in East and West Africa; and (3) it provides sufficient initial confidence in the bioLPG proposition to justify the grant of further funds for carrying out detailed feasibility studies and subsequent construction of demonstration plants that can lead to full bioLPG commercialization in SSA.

Taken as a whole, the findings of this study should function as a foundation methodology and justification for development of bioLPG project feasibility studies in SSA countries, leading toward the possibility in the medium-term (before 2030) of bioLPG starting to become a major contributor toward provision of MECS in SSA and achievement of SDG 7 clean cooking objectives.

The attractiveness of quickly moving on development of bioLPG for serving clean cooking needs is heightened by the possibility that increased emphasis on, and investment in, LPG could reduce by as much as an order of magnitude the amount of investment and use of public sector funds necessary to create clean cooking for a substantial portion of SSA households before 2030. LPG and bioLPG can make a very significant contribution to the global community's ambition to achieve universal energy access, including its key element of clean cooking.

Supplementary Materials: The following additional sections are online at www.mdpi.com/xxx/s1: (i) Methodology and assumptions for the TEA capital and operating cost estimates and Table S1: Country-level data on Industry CapEx and Consumer CapEx required to create physical LPG capability in Sub-Saharan Africa

Author Contributions: KC and EP designed the study. KC, EP, ML wrote the paper with contribution from all co-authors. PL and TM led the technical pathway analysis. MB, OM and FK led the feedstock analysis. MT wrote the policy section. PL and ML developed the cost estimates for the bioLPG plant and feedstock preparation. JH, DS, AE conducted the financial analysis. All co-authors discussed the results and reviewed the manuscript.

Funding: This work was supported by the Modern Energy Cooking Solutions (MECS) programme, funded by UK Aid (GB-GOV-1-300123). The authors further acknowledge the support of the CLEAN-Air (Africa) Global Health Research Group in dissemination and publication. CLEAN-Air (Africa) is funded by the National Institute for Health Research (NIHR) (ref: 17/63/155) using UK aid from the UK government to support global health research. The views expressed in this publication are those of the authors and not necessarily those of the UK- Aid or NIHR or the UK Department of Health and Social Care.

Acknowledgments: Authors would like to thank the following individuals for their contribution to the work: James Seaba, Sekar Darujati, Ron Stanis, Renzo Bee.

Conflicts of Interest: The authors declare no conflict of interest. Patrick Littlewood and Terry Marker are senior researchers at the Gas Technology Institute (GTI) and had no impact on interpretation of the data. GTI is the non-profit gas research institution established by the merger of the US government and industry gas research institutes.

References

1. ESMAP. The State of Access to Modern Energy Cooking Services. Washington, DC: World Bank. Available online: <https://www.worldbank.org/en/topic/energy/publication/the-state-of-access-to-modern-energy-cooking-services> (accessed on 19 May 2021).
2. IEA. World Energy Outlook 2020 – Analysis. Paris: International Energy Agency. Available online: <https://www.iea.org/reports/world-energy-outlook-2020> (accessed on 19 May 2021).
3. Van Leeuwen, R.; Evans, A.; Hyseni Increasing the Use of Liquefied Petroleum Gas in Cooking in Developing Countries. Available online: <https://openknowledge.worldbank.org/handle/10986/26569> (accessed on 19 May 2021).
4. IEA. SDG7: Data and Projections. Paris: International Energy Agency. Available online: <https://www.iea.org/reports/sdg7-data-and-projections> (accessed on 19 May 2021).
5. Puzzolo, E.; Zerriffi, H.; Carter, E.; Stokes, H. Supply Considerations for Scaling Up Clean Cooking Fuels for Household Energy in Low- and Middle-Income Countries. *GeoHealth*. 3, 1–21. doi: <https://doi.org/10.1029/2019GH000208>
6. WHO, 2016. Burning Opportunity: Clean Household Energy for Health, Sustainable Development, and Wellbeing of Women and Children. Geneva: World Health Organization. Available online: <http://www.who.int/airpollution/publications/burning-opportunities/en/> (accessed on 19 May 2021).
7. Puzzolo, E.; Cloke, J.; Evans, A.; Pope, D. National Scaling up of LPG to Achieve SDG 7: Implications for Policy, Implementation, Public Health and Environment. Available online: https://www.mecs.org.uk/wp-content/uploads/2020/2002/MECS-LPG-Briefing-Paper_Jan-2020.pdf. (accessed on 19 May 2021).
8. WLPGA; GLPGP, 2019. Sustainable Development Goals: Contributions of LPG. Paris and New York: World LP Gas Association and Global LPG Partnership. Available online: <https://www.wlpga.org/wp-content/uploads/2019/02/Sustainable-Development-Goals-Contributions-of-LPG.pdf> (accessed on 19 May 2021).
9. Mani, S.; Jain, A.; Tripathi, S.; Gould, C.F. The Drivers of Sustained Use of Liquefied Petroleum Gas in India. *Nat. Energy* 2020, 5, 450–457, doi:10.1038/s41560-020-0596-7.
10. Thoday, K.; Benjamin, P.; Gan, M.; Puzzolo, E. The Mega Conversion Program from Kerosene to LPG in Indonesia: Lessons Learned and Recommendations for Future Clean Cooking Energy Expansion. *Energy Sustain. Dev.* 2018, 46, 71–81, doi:10.1016/j.esd.2018.05.011.
11. WLPGA, 2015. Guidelines for Good Safety Practices in the LPG Industry. Paris: World LP Gas Association. Available online: <https://online.fliphtml5.com/addge/mysql/#p=1> (accessed on 19 May 2021).
12. IEA. Energy Access Outlook: From Poverty to Prosperity WEO-2017 Special Report. Paris: International Energy Agency. Available online: <https://www.iea.org/reports/energy-access-outlook-2017> (accessed on 19 May 2021).
13. WLPGA, 2020. Statistical Review of Global LPG 2020. Paris: World LP Gas Association.
14. GLPGP, 2020. Assessing Potential for BioLPG Production and Use within the Cooking Energy Sector in Africa. New York: Global LPG Partnership. Available online: <https://www.ccoalition.org/en/resources/assessing-potential-biolpg-production-and-use-within-cooking-energy-sector-africa> (accessed on 19 May 2021).
15. Johnson, E. Process Technologies and Projects for BioLPG. *Energies* 2019, 12, 250, doi:10.3390/en12020250.
16. WLPGA, 2019. The Role of LPG & BioLPG in Europe. Paris: World LP Gas Association.

- 839 17. UNEP, 2018. Africa Waste Management Outlook. Paris: United National Environmental Programme. Available online:
840 https://wedocs.unep.org/bitstream/handle/20.500.11822/25514/Africa_WMO.pdf (accessed on 19 May 2021).
- 841 18. DECC, 2014. RHI Evidence Report: Biopropane for Grid Injection.; London: Department of Energy and Climate Change,
- 842 19. Goldemberg, J.; Martinez-Gomez, J.; Sagar, A.; Smith, K. Household Air Pollution, Health, and Climate Change – Clearing
843 the Air. *Environ. Res. Lett.* 13, 030201. doi: <https://iopscience.iop.org/article/10.1088/1748-9326/aaa49d/meta>
- 844 20. Kypridemos, C., Puzzolo, E.; Aamaas, B.; Hyseni, L.; Shupler, M.; Aunan K.; Pope D. Health and Climate Impacts of Scaling
845 Adoption of Liquefied Petroleum Gas (LPG) for Clean Household Cooking in Cameroon: A Modeling Study. *Environ.*
846 *Health Perspect.* 128, 047001, doi:10.1289/EHP4899.
- 847 21. Singh, D.; Pachauri, S.; Zerriffi, H. Environmental Payoffs of LPG Cooking in India. *Environ. Res. Lett.* 2017, 12, 115003,
848 doi:10.1088/1748-9326/aa909d.
- 849 22. Bruce, N.; de Cuevas, R.A.; Cooper, J.; Enonchong, B.; Ronzi, S.; Puzzolo, E.; MBatchou, B.; Pope, D. The Government-Led
850 Initiative for LPG Scale-up in Cameroon: Programme Development and Initial Evaluation. *Energy Sustain. Dev.* 2018, 46,
851 103–110, doi:10.1016/j.esd.2018.05.010.
- 852 23. Climate Justice Alliance. Just Transition - A Framework for Change. Available online:
853 <https://climatejusticealliance.org/just-transition/> (accessed on 20 May 2021).
- 854 24. WHO. WHO Household Energy Database. Geneva: World Health Organization. Available online:
855 <https://www.who.int/data/gho/data/indicators/indicator-details/GHO/gho-phe-primary-reliance-on-clean-fuels-and-technologies-proportion> (accessed on 20 May 2021).
- 856 25. GLPGP. National Feasibility Study: LPG for Clean Cooking in Cameroon. New York: Global LPG Partnership. Available
857 online: <http://glpgp.org/country-feasibility-and-investment-reports> (accessed on 19 May 2021).
- 858 26. GLPGP National Feasibility Study: LPG for Clean Cooking in Ghana. New York: Global LPG Partnership. Available online:
859 <http://glpgp.org/country-feasibility-and-investment-reports> (accessed on 19 May 2021).
- 860 27. GLPGP. National Feasibility Study: LPG for Clean Cooking in Kenya. New York: Global LPG Partnership. Available online:
861 <http://glpgp.org/country-feasibility-and-investment-reports> (accessed on 19 May 2021).
- 862 28. GLPGP & MININFRA. 2021. National Feasibility Study: LPG for Clean Cooking in Rwanda. Global LPG Partnership: New
863 York.
- 864 29. Gustafsson, M.; Anderberg, S. Dimensions and Characteristics of Biogas Policies – Modelling the European Policy Land-
865 scape. *Renew. Sustain. Energy Rev.* 2021, 135, 110200, doi:10.1016/j.rser.2020.110200.
- 866 30. Torrijos, M. State of Development of Biogas Production in Europe. *Procedia Environ. Sci.* 2016, 35, 881–889,
867 doi:10.1016/j.proenv.2016.07.043.
- 868 31. Kemausuor, F.; Adaramola, M.S.; Morken, J. A Review of Commercial Biogas Systems and Lessons for Africa. *Energies* 2018,
869 11, 2984, doi:10.3390/en11112984.
- 870 32. Kidmo, D.K.; Deli, K.; Bogno, B. Status of Renewable Energy in Cameroon. *Renew. Energy Environ. Sustain.* 2021, 6, 2,
871 doi:10.1051/rees/2021001.
- 872 33. Faye, C.M.; Mbera, B.; Kaberia, C.; Deng, C. Solid Waste Management and Risks to Health in Urban Africa: A Study of Da-
873 kar City, Senegal. Available online:
874 <https://www.urbanark.org/solid-waste-management-and-risks-health-urban-africa-study-dakar-city-senegal> (accessed on 19
875 May 2021).
- 876 34. Multiconsult & Norad, 2020. Final Report Study on the Potential of Increased Use of LPG for Cooking in Developing Coun-
877 tries. Oslo: Multiconsult & Norwegian Agency for Development Cooperation. Available online:
878 https://www.multiconsultgroup.com/assets/LPG-for-Cooking-in-Developing-Countries_Report-by-Multiconsult.pdf (ac-
879 cessed on 19 May 2021).
- 880 35. Rosales-Calderon, O.; Arantes, V. A Review on Commercial-Scale High-Value Products That Can Be Produced alongside
881 Cellulosic Ethanol. *Biotechnol. Biofuels* 2019, 12, 240, doi:10.1186/s13068-019-1529-1.
- 882 36. Pandey, A.; Larroche, C.; Ricke, S.C. *Biofuels: Alternative Feedstocks and Conversion Processes*; Academic Press, 2011; ISBN
883 978-0-12-385099-7.
- 884 37. GTI. Expert Analysis of the Concept of Synthetic and/or Bio-LPG. Washington DC: Gas Technology Institute. Available
885 online: https://propane.com/wp-content/uploads/2020/01/15866_PERC_BioPropane.pdf (accessed on 20 May 2021).
- 886 38. Kaza, S.; Yao, L.; Bhada-Tata, P.; Van Woerden, F. *What a Waste 2.0: A Global Snapshot of Solid Waste Management to 2050*;
887 *Urban Development*; The World Bank, 2018; ISBN 978-1-4648-1329-0.
- 888 39. Arthur, R.; Baidoo, M.F.; Antwi, E. Biogas as a Potential Renewable Energy Source: A Ghanaian Case Study. *Renew. Energy*
889 2011, 36, 1510–1516, doi:10.1016/j.renene.2010.11.012.
- 890 40. Kemausuor, F.; Kamp, A.; Thomsen, S.T.; Bensah, E.C.; Østergård, H. Assessment of Biomass Residue Availability and Bio-
891 energy Yields in Ghana. *Resour. Conserv. Recycl.* 2014, 86, 28–37, doi:10.1016/j.resconrec.2014.01.007.
- 892 41. Nelson, N.; Darkwa, J.; Calautit, J.; Worall, M.; Mokaya, R.; Adjei, E.; Kemausuor, F.; Ahiekpor, J. Potential of Bioenergy in
893 Rural Ghana. *Sustainability* 2021, 13, 381, doi:10.3390/su13010381.
- 894 42. Arthur, R.; Baidoo, M.F.; Brew-Hammond, A.; Bensah, E.C. Biogas Generation from Sewage in Four Public Universities in
895 Ghana: A Solution to Potential Health Risk. *Biomass Bioenergy* 2011, 35, 3086–3093, doi:10.1016/j.biombioe.2011.04.019.
- 896

- 897 43. Miezah, K.; Obiri-Danso, K.; Kádár, Z.; Fei-Baffoe, B.; Mensah, M.Y. Municipal Solid Waste Characterization and Quantifi-
898 cation as a Measure towards Effective Waste Management in Ghana. *Waste Manag.* **2015**, *46*, 15–27,
899 doi:10.1016/j.wasman.2015.09.009.
- 900 44. Mohammed, M.; Egyir, I.S.; Donkor, A.K.; Amoah, P.; Nyarko, S.; Boateng, K.K.; Ziwu, C. Feasibility Study for Biogas Inte-
901 gration into Waste Treatment Plants in Ghana. *Egypt. J. Pet.* **2017**, *26*, 695–703, doi:10.1016/j.ejpe.2016.10.004.
- 902 45. UNEP. Sustainability of Sugarcane Bagasse Briquettes and Charcoal Value Chains in Kenya: Results and Recommendations
903 from Implementation of the Global Bioenergy Partnership (GBEP) Indicators. Available online:
904 <https://wedocs.unep.org/bitstream/handle/20.500.11822/31122/GBEPKs.pdf?sequence=1&isAllowed=y> (accessed on 19 May
905 2021).
- 906 46. Mugodo, K.; Magama, P.P.; Dhavu, K. Biogas Production Potential from Agricultural and Agro-Processing Waste in South
907 Africa. *Waste Biomass Valorization* **2017**, *8*, 2383–2392, doi:10.1007/s12649-017-9923-z.
- 908 47. Fischer, E.; Schmidt, T.; Hora, S.; Giersdorf, J.; Stinner, W.; Scholwin, F. Agro-Industrial Biogas in Kenya, Potentials, Esti-
909 mates for Tariffs, Policy and Business Recommendations. Available online:
910 <http://digicollection.org/eebea/documents/s20341en/s20341en.pdf> (accessed on 19 May 2021).
- 911 48. MINICOM. Industrial Master Plan for the AgroProcessing Subsector (2014 - 2020). Available online:
912 <https://rwandatrade.rw/media/2014-20%20MINICOM%20Agro-Processing%20Industrial%20Masterplan.pdf> (accessed on 19
913 May 2021).
- 914 49. Alice, U.; Ming, Y.; Nestor, U.; Donath, N.; Narcisse, N. Liquid Wastes Treatment and Disposal in Rwanda. *J. Pollut. Eff.*
915 *Control* **2017**, *5*, 1–5, doi:doi: 10.4176/2375-4397.1000197.
- 916 50. MININFRA. National Sanitation Policy. Available online:
917 https://www.rura.rw/fileadmin/Documents/Water/Laws/NATIONAL_SANITATION_POLICY_DECEMBER_2016.pdf.
- 918 51. Government of Ghana. Ghana’s Intended Nationally Determined Contribution (INDC) and Accompanying Explanatory
919 Note.; 2015;
- 920 52. Government of Ghana. Mainstreaming Ghana’s Nationally Determined Contributions (Gh-INDCs) into National Develop-
921 ment Plans.; Accra, Ghana, 2017;
- 922 53. Republic of Kenya. Kenya’s First National Determined Contributions (Updated Version). Available online:
923 [https://www4.unfccc.int/sites/ndcstaging/PublishedDocuments/Kenya%20First/Kenya%27s%20First%20%20NDC%20\(upda
924 ted%20version\).pdf](https://www4.unfccc.int/sites/ndcstaging/PublishedDocuments/Kenya%20First/Kenya%27s%20First%20%20NDC%20(updated%20version).pdf) (accessed on 19 May 2021).
- 925 54. Republic of Rwanda. Updated Nationally Determined Contribution. Available online:
926 https://www4.unfccc.int/sites/ndcstaging/PublishedDocuments/Rwanda%20First/Rwanda_Updated_NDC_May_2020.pdf.
- 927 55. Republic of Kenya. The Energy Act. Available online:
928 https://kplc.co.ke/img/full/o8wccHsFPaZ3_ENERGY%20ACT%202019.pdf (accessed on 19 May 2021).
- 929 56. Government of Ghana. National Energy Policy (Draft). Available online:
930 <http://www.energycom.gov.gh/files/snep/MAIN%20REPORT%20final%20PD.pdf> (accessed on 19 May 2021).
- 931 57. Müller, F.; Claar, S.; Neumann, M.; Elsner, C. Is Green a Pan-African Colour? Mapping African Renewable Energy Policies
932 and Transitions in 34 Countries. *Energy Res. Soc. Sci.* **2020**, *68*, 101551, doi:10.1016/j.erss.2020.101551.
- 933 58. Haregu, T.N.; Ziraba, A.K.; Aboderin, I.; Amugsi, D.; Muindi, K.; Mberu, B. An Assessment of the Evolution of Kenya’s Sol-
934 id Waste Management Policies and Their Implementation in Nairobi and Mombasa: Analysis of Policies and Practices. *En-
935 viron. Urban.* **2017**, *29*, 515–532, doi:10.1177/0956247817700294.
- 936 59. Aparcana, S. Approaches to Formalization of the Informal Waste Sector into Municipal Solid Waste Management Systems in
937 Low- and Middle-Income Countries: Review of Barriers and Success Factors. *Waste Manag.* **2017**, *61*, 593–607,
938 doi:10.1016/j.wasman.2016.12.028.
- 939 60. Bello, I.; Ismail, M.; Kabbashi, N. Solid Waste Management in Africa: A Review. *Int. J. Waste Resour.* **2016**, *6*,
940 doi:10.4172/2252-5211.1000216.
- 941 61. Kamp, L.M.; Bermúdez Forn, E. Ethiopia’s Emerging Domestic Biogas Sector: Current Status, Bottlenecks and Drivers. *Re-
942 new. Sustain. Energy Rev.* **2016**, *60*, 475–488, doi:10.1016/j.rser.2016.01.068.
- 943 62. African Development Bank. Private Sector Development Policy of the African Development Bank Group. Available online:
944 [https://www.afdb.org/sites/default/files/documents/policy-documents/private_sector_development_policy_of_the_afdb_gro
946 up.pdf](https://www.afdb.org/sites/default/files/documents/policy-documents/private_sector_development_policy_of_the_afdb_gro
945 up.pdf) (accessed on 20 May 2021).
- 946 63. Republic of Kenya. The Climate Change Act. Available online:
947 <http://kenyalaw.org/kl/fileadmin/pdfdownloads/Acts/ClimateChangeActNo11of2016.pdf> (accessed on 20 May 2021).
- 948 64. ADI Analytics. Natural Gas Utilization via Small-Scale Methanol Technologies. Available online:
949 http://www.sgicc.org/uploads/8/4/3/1/8431164/bftp_methanol_white_paper_vf.pdf (accessed on 23 May 2021).
- 950 65. Stokes Consulting Group. The Economics of Methanol Production in Nigeria Based on Large Low-Cost Gas Resources.
951 Available online:
952 [https://www.projectgaia.com/documents/The%20Economics%20of%20Methanol%20Production%20in%20Nigeria%20Based
954 %20on%20Large%20Low-Cost%20Gas.pdf](https://www.projectgaia.com/documents/The%20Economics%20of%20Methanol%20Production%20in%20Nigeria%20Based
953 %20on%20Large%20Low-Cost%20Gas.pdf) (accessed on 23 May 2021).
- 954 66. Rajasheker, A.; Bowers, A.; Gatoni, A.S. Assessing Waste Management Services in Kigali. Available online:
955 <https://www.theigc.org/wp-content/uploads/2019/11/Rajashekar-et-al-2019-paper.pdf> (accessed on 19 May 2021).

- 956 67. Kabera, T.; Wilson, D.C.; Nishimwe, H. Benchmarking Performance of Solid Waste Management and Recycling Systems in
957 East Africa: Comparing Kigali Rwanda with Other Major Cities. *Waste Manag. Res.* 2019, *37*, 58–72,
958 doi:10.1177/0734242X18819752.
- 959 68. Hogg, D. Costs for Municipal Waste Management in the EU. Available online:
960 <http://projects.mcrit.com/ceara/attachments/article/154/cost%20for%20municipal%20waste%20management%20UE.pdf> (ac-
961 cessed on 19 May 2021).
- 962 69. Wheeler, P.A.; Rome, L. Waste Pre-Treatment: A Review. UK Gov Environment Agency. Available online:
963 https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/290316/sp1-344-tr-e-e.pdf
964 f (accessed on 19 May 2021).
- 965 70. Pressley, P.N.; Levis, J.W.; Damgaard, A.; Barlaz, M.A.; DeCarolis, J.F. Analysis of Material Recovery Facilities for Use in
966 Life-Cycle Assessment. *Waste Manag.* 2015, *35*, 307–317, doi:10.1016/j.wasman.2014.09.012.
- 967 71. Stapf, D.; Ceceri, G.; Johansson, I.; Whitty, K. Biomass Pre-Treatment for Bioenergy – Case Study 3: Pretreatment of Muni-
968 cipal Solid Waste (MSW) for Gasification. Available online:
969 <https://www.ieabioenergy.com/blog/publications/biomass-pre-treatment-for-bioenergy-case-study-3-pretreatment-of-municipal-solid-waste-msw-for-gasification/> (accessed on 19 May 2021).
- 970 72. Kenya News Agency. Government to Establish Agro-Processing Hubs. Available online:
971 <https://www.kenyanews.go.ke/government-to-establish-agro-processing-hubs/> (accessed on 19 May 2021).
- 972 73. Nielsen, C.F. Briquetting Solution for Agricultural Waste in Africa. Available online:
973 <https://cfnielsen.com/tapping-the-untapped/> (accessed on 19 May 2021).
- 974 74. GIZ, 2015. Kenyan Flower Industry – Potential for Renewable Energy. Available
975 online:[https://www.german-energy-solutions.de/GES/Redaktion/DE/Publikationen/Marktanalysen/2015/studie_2015_subsec-
976 tor-flower-industry-kenya.pdf?__blob=publicationFile&v=6](https://www.german-energy-solutions.de/GES/Redaktion/DE/Publikationen/Marktanalysen/2015/studie_2015_subsector-flower-industry-kenya.pdf?__blob=publicationFile&v=6) (accessed on 19 May 2021).
- 977 75. Kanyiri, G.; Waswa, F. Enhancing Benefits from Biomass Wastes within Small-Medium Scale Coffee Processing Factories in
978 Kiambu County, Kenya. *Afr. J. Environ. Sci. Technol.* 2017, *11*, 198–206, doi:10.5897/AJEST2016.2243.
- 979 76. Kioko, P. Pineapple Waste Fraction from Delmonte Limited Kenya. 2020.
- 980 77. Rajuai, C. Transport Data 2020.
- 981 78. Basile, I.; Dutra, J. Blended Finance Funds and Facilities: 2018 Survey Results; OECD Development Co-operation Working
982 Papers; OECD Publishing, 2019.
- 983 79. Convergence. The State of Blended Finance 2019 - Convergence Resources. Available online:
984 <https://www.convergence.finance/resource/13VZmRUtiK96hqAvUPk4rt/view> (accessed on 19 May 2021).
- 985 80. Troncoso, K.; Soares da Silva, A. LPG Fuel Subsidies in Latin America and the Use of Solid Fuels to Cook. *Energy Policy*
986 2017, *107*, 188–196, doi:10.1016/j.enpol.2017.04.046.
987
988
989